

# 1897 to 1903MHz –Band Stop Filter

## Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

## RF Characteristics

Model Number	Band Reject Frequency (MHz)	Pass Band Frequency	Band Reject Rejection Min(dB)	VSWR Max	Insertion Loss Max(dB)	Power (W)	Connector Type	Temp.(°C)
UIYBSF12970A1897T1903SF	1897 ~ 1903	DC~1885MHz 1915~3000MHz	40	2.0	1.5	50	SMA-F	-55 ~ +85

- 2 Listed are specific frequency ranges and other tailor-made ranges are available.
- 2 Please provide the below information when inquiring and mark \* is required.
- \* 1. The specific pass band frequency range.
- \* 2. The specific rejection and frequency.
3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.).

## Mechanical Drawing

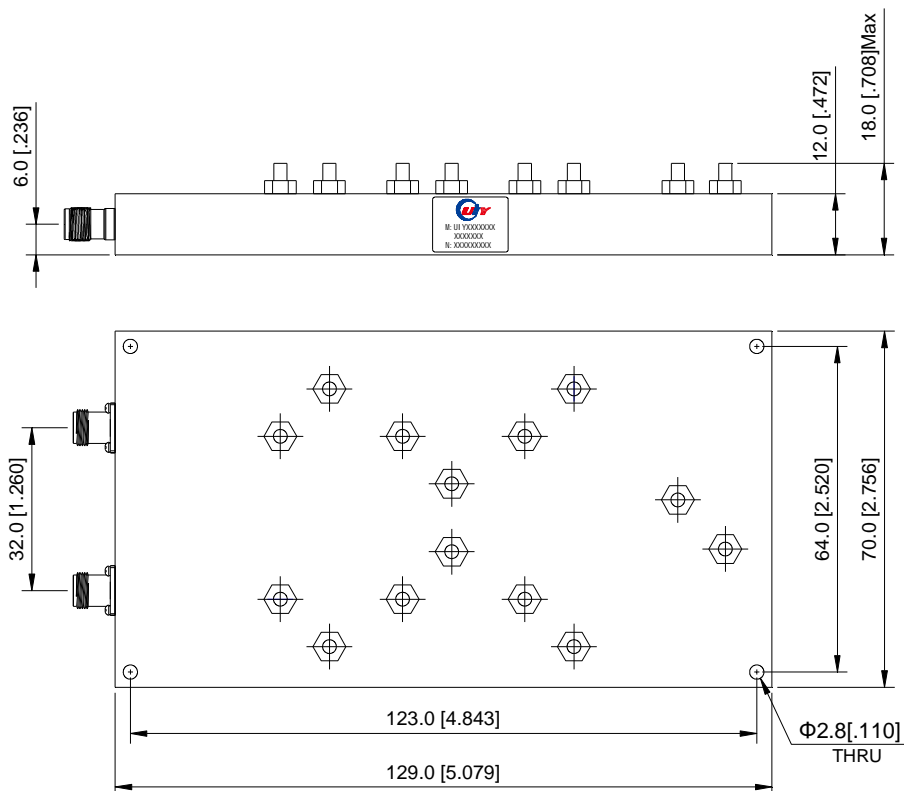

Unit: mm/ inch, General part tolerance is  $\pm 0.2$ mm unless otherwise stated.

Ver. 5