

# WR15 (BJ620) - Waveguide to Coaxial Adapter

## Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

## RF Characteristics

| Model Number       | Freq.Range (GHz) | Insertion Loss Max(dB) | VSWR Max | Connector Type (Waveguide) | Connector Type (Coaxial) | CW Power (W) | Peak Power (W) | Temp.(°C) |
|--------------------|------------------|------------------------|----------|----------------------------|--------------------------|--------------|----------------|-----------|
| UIYWTCWR15F50T751F | 50 ~ 75          | 0.6                    | 1.5      | WR15 (BJ620)               | 1.0mm-F                  | 3            | 100            | -55 ~ +85 |

- <sup>2</sup> Listed are specific frequency ranges and other tailor-made ranges are available.
- <sup>2</sup> Please provide the below information when inquiring and mark \* is required.
- \* 1. The specific frequency ranges.
2. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

## Mechanical Drawing

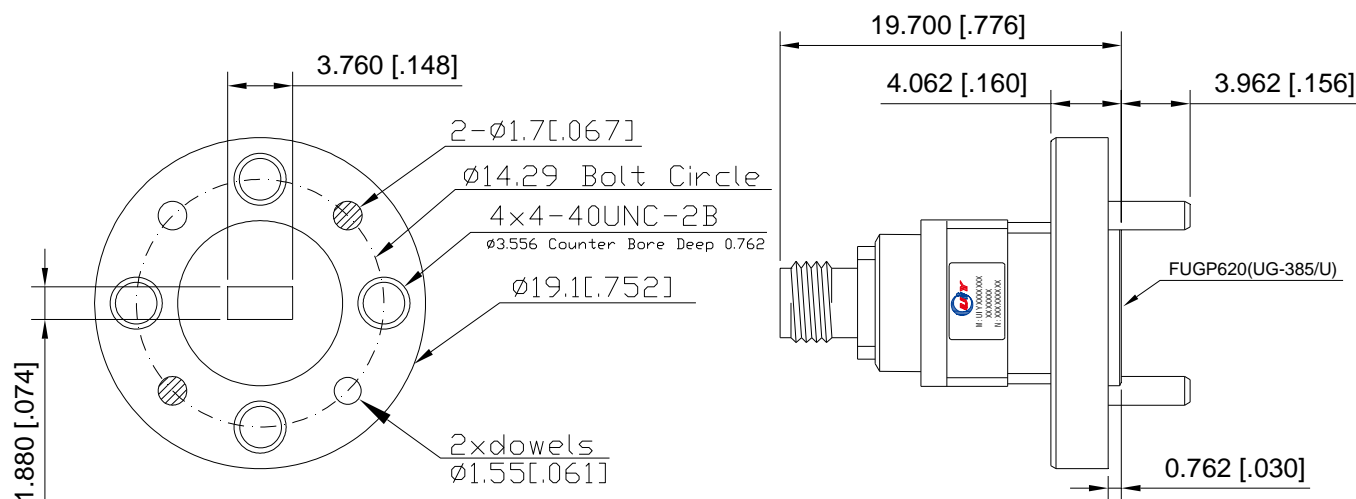

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5