

## WR34 (BJ260) - Waveguide to Coaxial Adapter

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

### RF Characteristics

Model Number	Freq.Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type (Coaxial)	CW Power (W)	Peak Power (W)	Temp.(°C)
UIYWTCWR34A217T33KF	21.7 ~ 33.0	0.25	1.2	WR34 (BJ260)	2.92mm-F	3	100	-55 ~ +85
UIYWTCWR34A217T33KM	21.7 ~ 33.0	0.25	1.2	WR34 (BJ260)	2.92mm-M	3	100	-55 ~ +85

- 2 Listed are specific frequency ranges and other tailor-made ranges are available.
- 2 Please provide the below information when inquiring and mark \* is required.
- \* 1. The specific frequency ranges.
2. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

### Mechanical Drawing

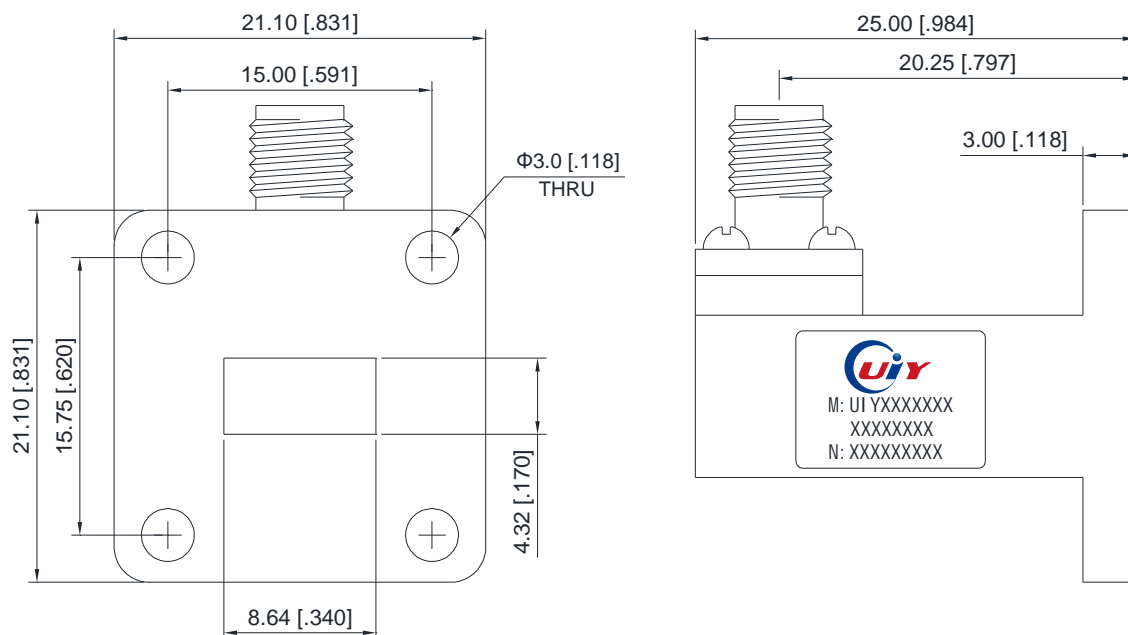

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5.3