

WR75 (BJ120) - Waveguide to Coaxial Adapter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

| Model Number | Freq.Range (GHz) | Insertion Loss Max(dB) | VSWR Max | Connector Type (Waveguide) | Connector Type (Coaxial) | CW Power (W) | Peak Power (KW) | Temp.(°C) |
|---------------------|------------------|------------------------|----------|----------------------------|--------------------------|--------------|-----------------|-----------|
| UIYWTCWR75A984T15SF | 9.84 ~ 15.0 | 0.2 | 1.15 | WR75 (BJ120) | SMA-F | 50 | 1 | -55 ~ +85 |

- 2 Listed are specific frequency ranges and other tailor-made ranges are available.
- 2 Please provide the below information when inquiring and mark * is required.
- * 1. The specific frequency ranges.
2. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

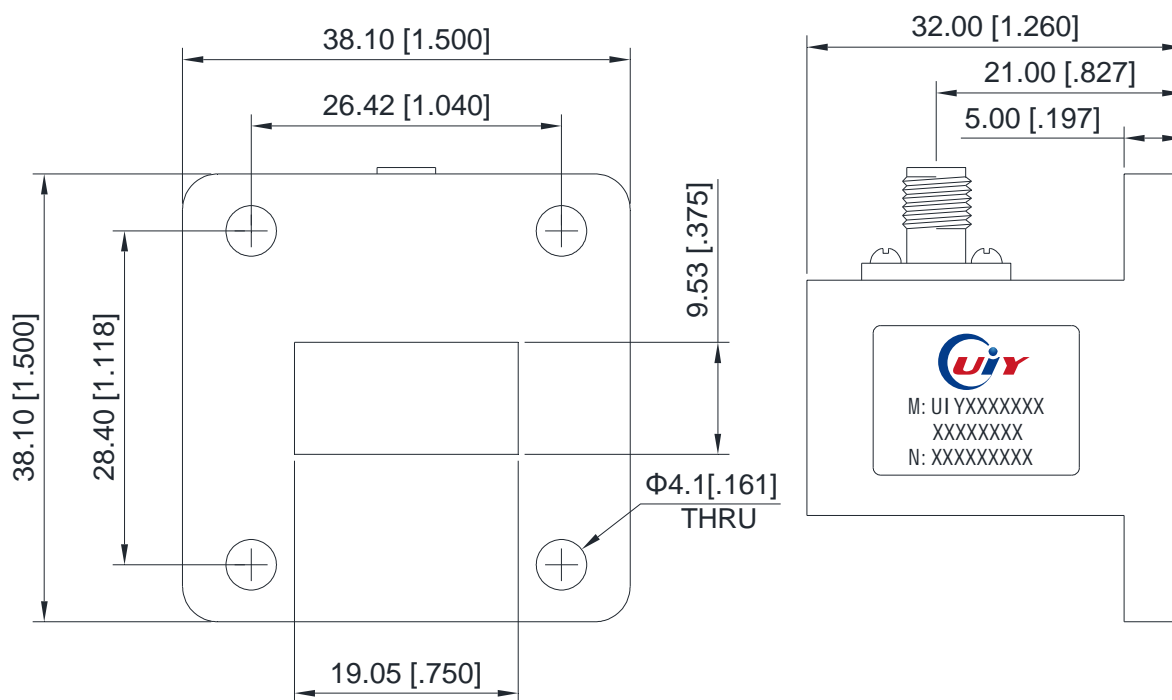

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.2