


350 to 520MHz - 2 TX 2 RX Transmission & Receiver System

ITEM		SPECIFICATION					
Model Number		UIY2T2RTR350158A4031T4185NF		UIY2T2RTR350158A4431T4485NF		UIY2T2RTR350158A4575T4676NF	
Frequency Range		CH1	CH2	CH1	CH2	CH1	CH2
	TX	403.1250MHz	404.6000MHz	443.1250MHz	443.4875MHz	457.5250MHz	457.5750MHz
	RX	417.2375MHz	418.5000MHz	448.1250MHz	448.4875MHz	467.5250MHz	467.5750MHz
Insertion Loss	4.8dB Max. @TX-ANT & ANT-RX						
Isolation	28.0dB Min. @TX-TX & RX-RX			75.0dB Min. @TX-RX & RX-TX			
VSWR	1.25:1 Max.						
Number of Channels	N Female @2xTX		N Female @2xRX		N Female @1xANT		
Input Power	50W/CH						
Receiver Multicoupler Amp	No						
Temperature Range	-30~+75℃						
Appearance color	Black						
Weight	~5.5 Kg						

Mechanical Drawing

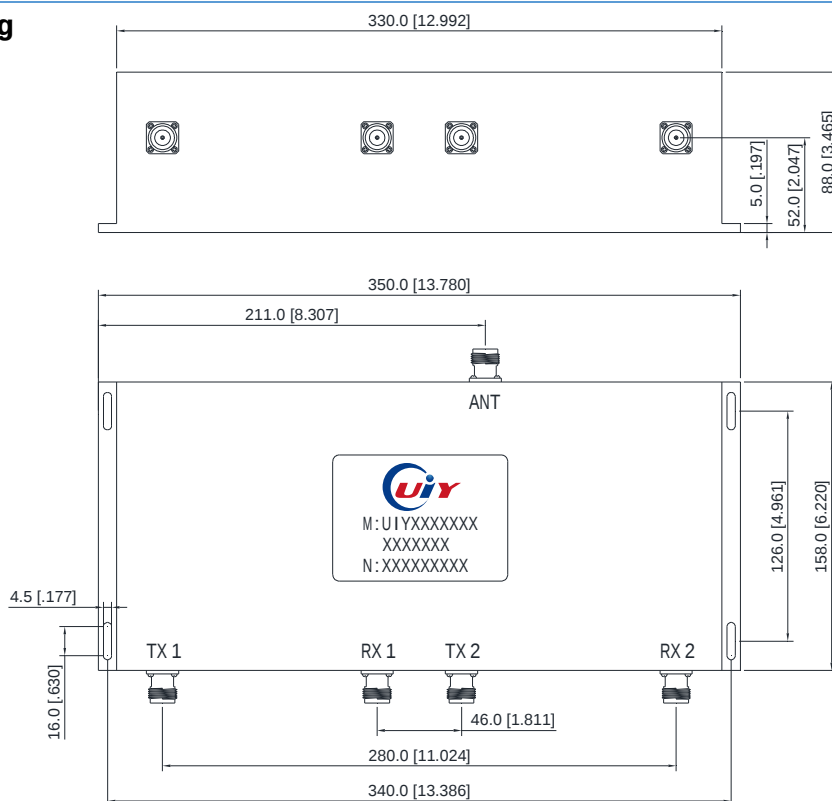

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 3.3