

8 to 12GHz – 4 Port Dual Junction Coaxial Circulator

Design Features

- ◆ Can be dual junction or multiple for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics


Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)		Isolation Min(dB)		VSWR Max	Forward Power (W)	Reverse Power (W)	Connector Type	Temp.(°C)
		1-2 3-4	2-3 4-1	2-1 4-3	1-4 3-2					
UIYBCC2618A4P8T12SF	8.0 ~ 12.0	1.0	0.5	36	18	1.3	60	60	SMA-F	-55 ~ +85
UIYBCC2618A4P8T12SMTSFTSFTSF	8.0 ~ 12.0	1.0	0.5	36	18	1.3	60	60	SMA-M @Port 1 SMA-F @Other	-55 ~ +85
UIYBCC2618A4P8T12SFTSMTSFTSF	8.0 ~ 12.0	1.0	0.5	36	18	1.3	60	60	SMA-M @Port 2 SMA-F @Other	-55 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.

² Please provide the information below when inquiring and mark * is required.

- * 1. The specific frequency ranges
- * 2. Power handling (Forward, Reverse, Peak, etc.)
- * 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)
- 4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

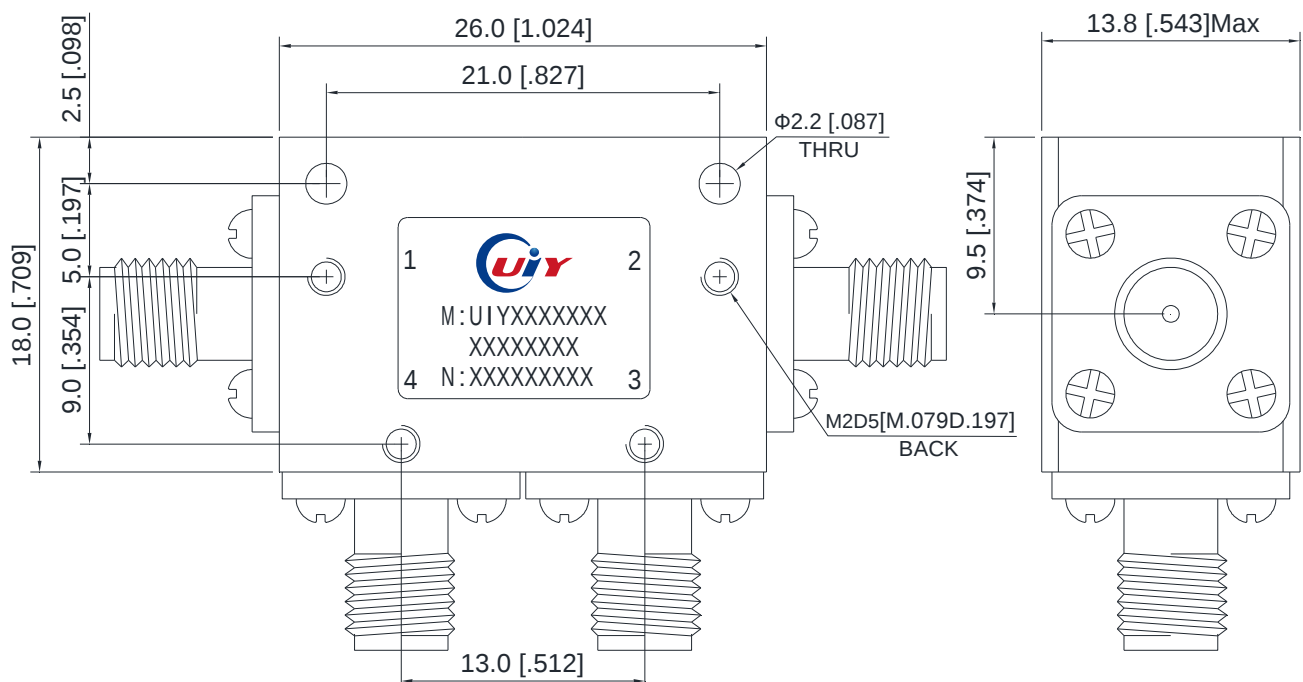

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5