

885 to 889MHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF10069A885T889SF	885 ~ 889	3.0	1.5	70dB @925~960MHz 40dB @DC~880MHz	50	SMA-F	-40 ~ +85
UIYBPF10069A885T889NF	885 ~ 889	3.0	1.5	70dB @925~960MHz 40dB @DC~880MHz	100	N-F	-40 ~ +85

- 2 Listed are specific frequency ranges and tailor-made ranges are available.
- 2 Please provide the below information when inquiring and mark * is required.
- * 1. The specific pass band frequency range
- * 2. The specific rejection and frequency
3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

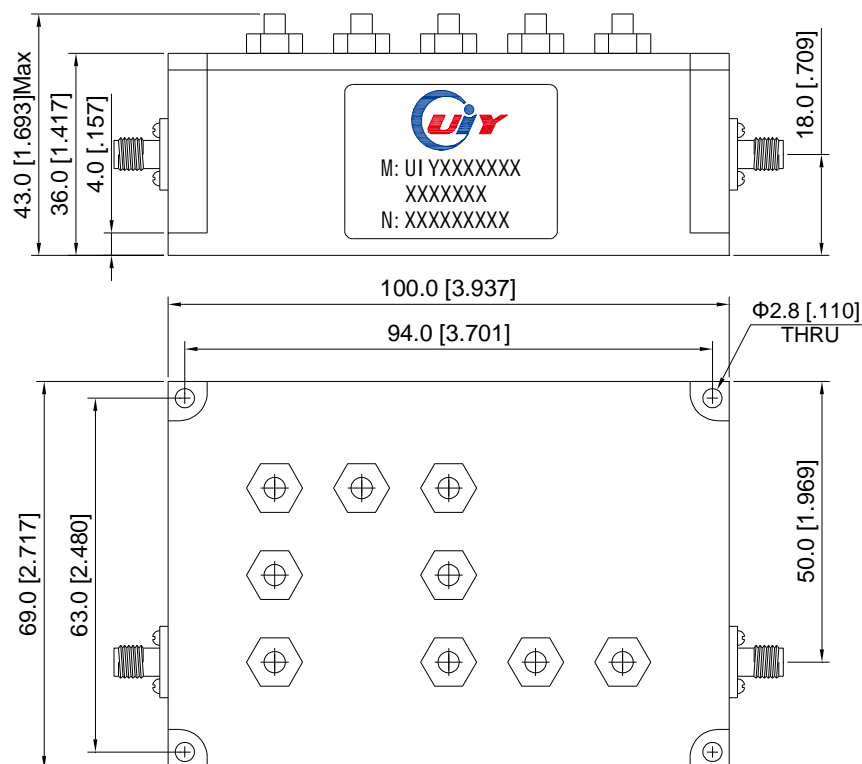

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5