

# 17475 to 17525MHz – Band Pass Filter


## Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

## RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF11022A17475T17525SF	17475 ~ 17525	3.0	1.45	30dB @17400MHz 30dB @17600MHz	10	SMA-F	-40 ~ +85
<p>2 Listed are specific frequency ranges and tailor-made ranges are available.</p> <p>2 Please provide the below information when inquiring and mark * is required.</p> <p>* 1. The specific pass band frequency range</p> <p>* 2. The specific rejection and frequency</p> <p>3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)</p>							

## Mechanical Drawing

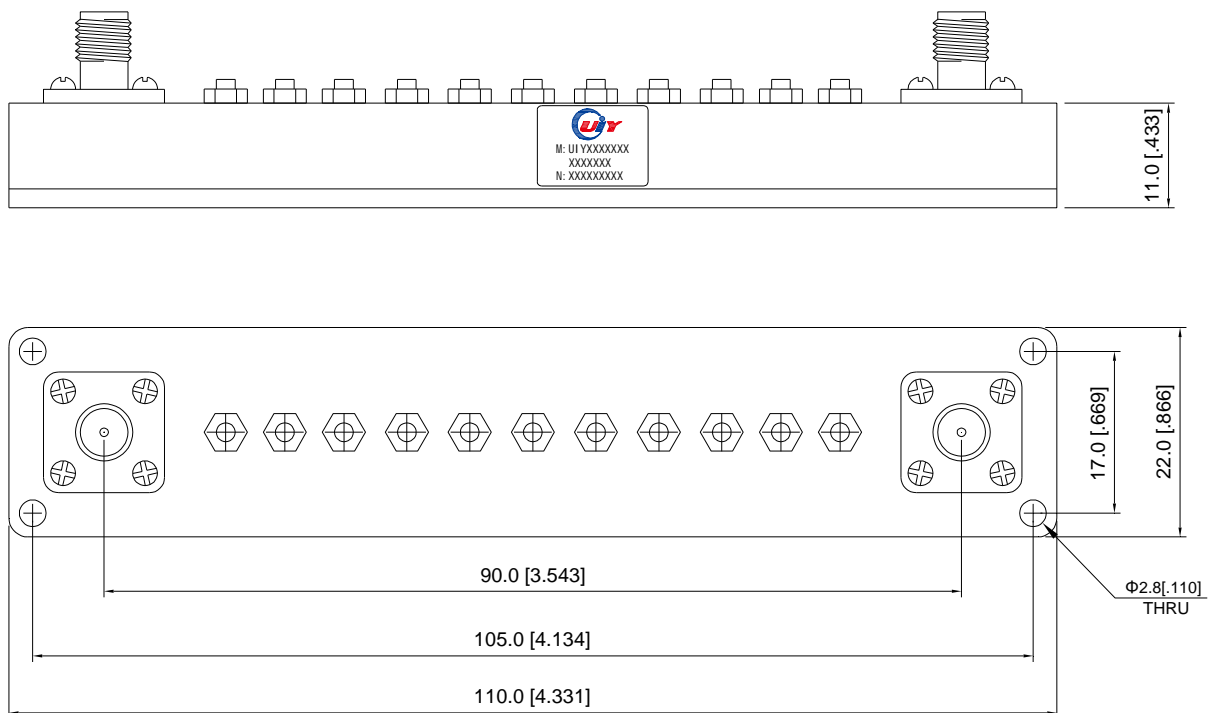

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5.1

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: [www.uiyinc.com](http://www.uiyinc.com)

E-mail: [sales@uiyinc.com](mailto:sales@uiyinc.com)