

7000 to 9000MHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF15547A7980T7990WR112TNF	7980 ~ 7990	3.0	1.25	6dB @7975MHz 6dB @7995MHz 16dB @7970MHz 16dB @8000MHz	50	WR112 to N-F	-40 ~ +85
UIYBPF15547A7990T8000WR112TNF	7990 ~ 8000	3.0	1.25	6dB @7985MHz 6dB @8005MHz 16dB @7980MHz 16dB @8010MHz	50	WR112 to N-F	-40 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the below information when inquiring and mark * is required.
 * 1. The specific pass band frequency range
 * 2. The specific rejection and frequency
 * 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

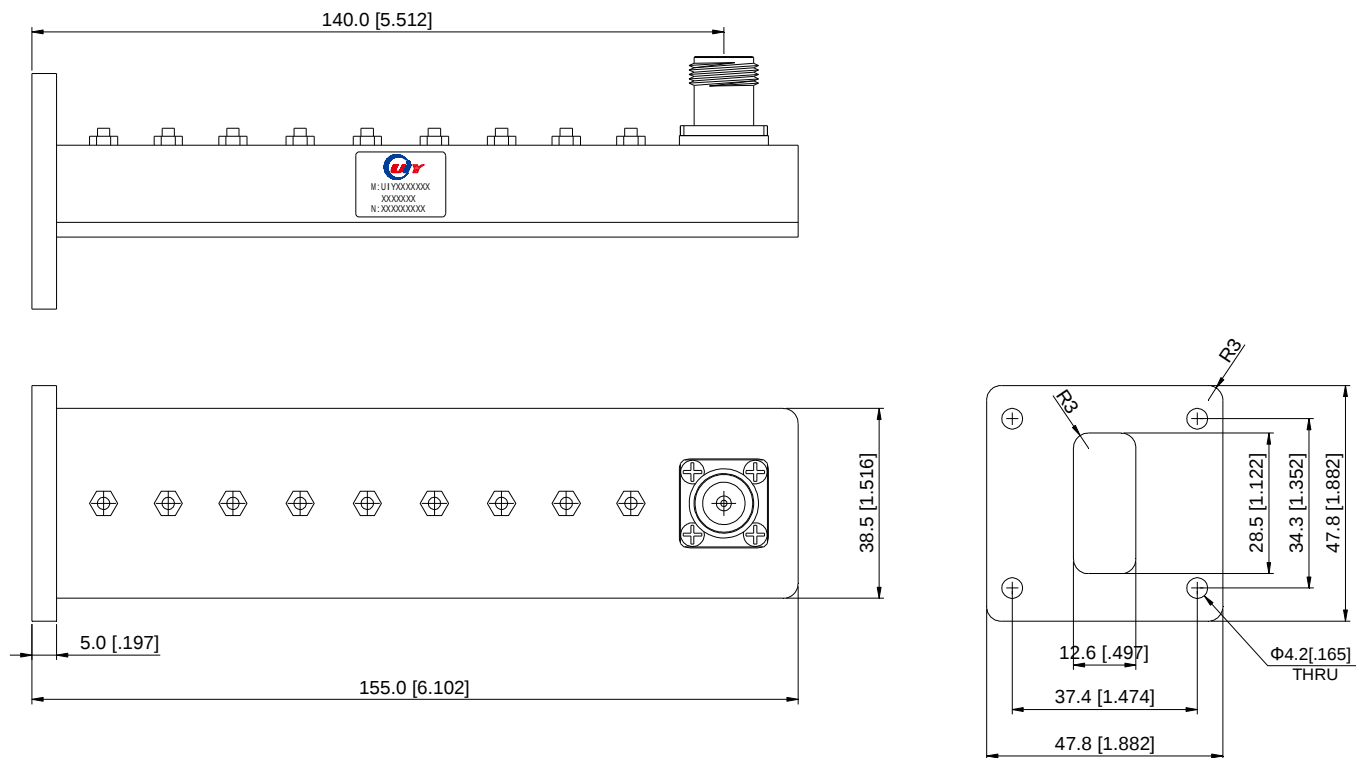

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiyinc.com

E-mail: sales@uiyinc.com