

360 to 380MHz – Band Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics


Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF220115B360T380SF	360 ~ 380	1.0	0.6	1.3	100dB@DC~340MHz 100dB@400~2000MHz 80dB@2000~2500MHz	100	SMA-F	-40 ~ +70
UIYBPF220115B360T380NF	360 ~ 380	1.0	0.6	1.3	100dB@DC~340MHz 100dB@400~2000MHz 80dB@2000~2500MHz	100	N-F	-40 ~ +70

² Listed are specific frequency ranges and tailor-made ranges are available.

² Please provide the below information when inquiring and mark * is required.

- * 1. The specific pass band frequency range
- * 2. The specific rejection and frequency
- 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

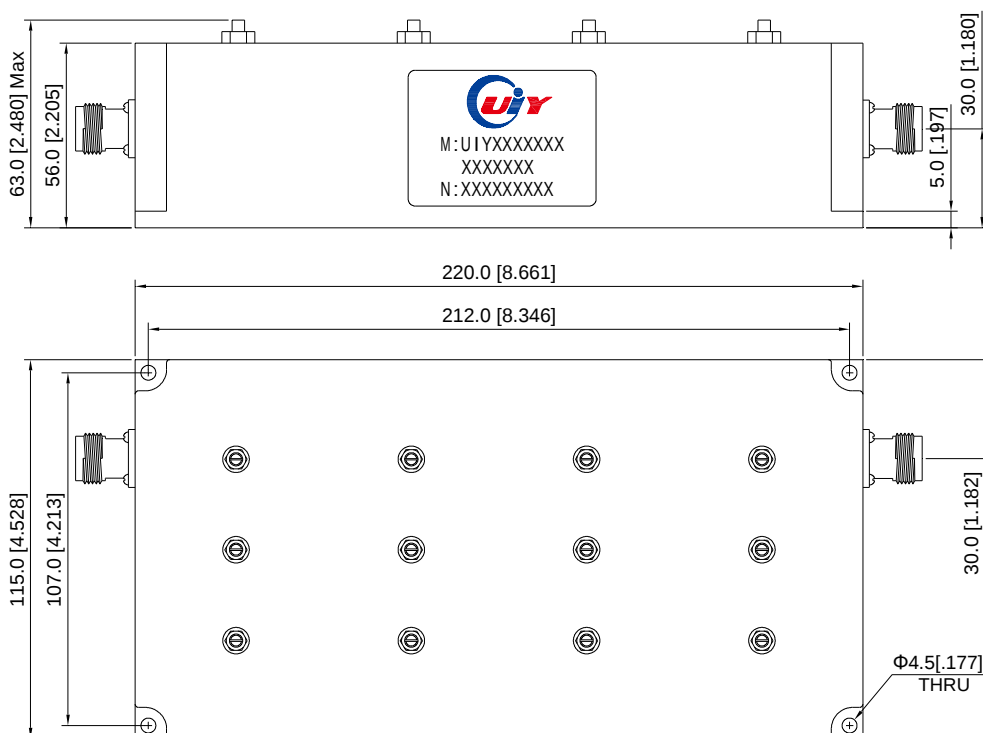

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiyinc.com

E-mail: sales@uiyinc.com