

## 225 to 400MHz – Band Pass Filter

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

### RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple Max	VSWR Max	Rejection Min	Power (W)	Connector Type	Temp.(°C)
UIYBPF4825B225T400SF	225 ~ 400	1.5	1.2	1.5	40dB@DC~200 MHz 40dB@500~1000MHz	30	SMA-F	-40 ~ +85

- <sup>2</sup> Listed are specific frequency ranges and tailor-made ranges are available.
- <sup>2</sup> Please provide the below information when inquiring and mark \* is required.
- \* 1. The specific pass band frequency range.
  - \* 2. The specific rejection and frequency.
  - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.).

### Mechanical Drawing

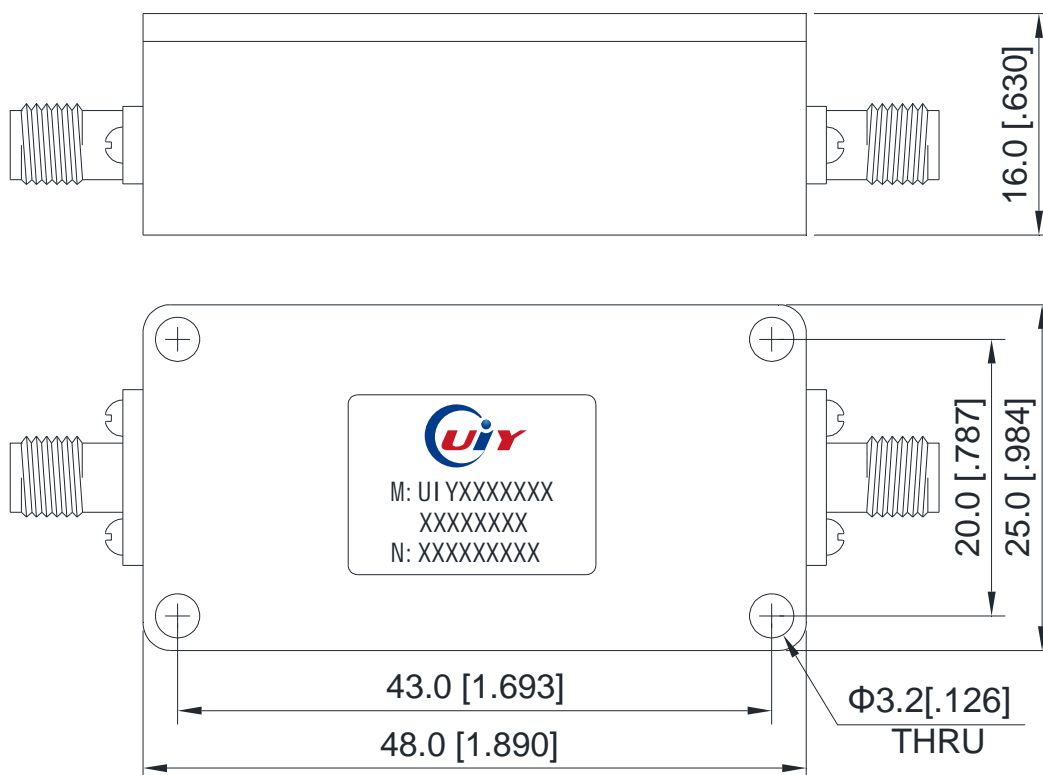

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5.0

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: [www.uiyinc.com](http://www.uiyinc.com)

Tel: +86-755-83748888

+86-755-25999990

Fax: +86-755-25999959

E-mail: [sales@uiyinc.com](mailto:sales@uiyinc.com)