

15925 to 16075MHz – Band Pass Filter


Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp. (°C)
UIYBPF6016B15925T16075SF	15925~16075	2.0	0.5	1.3	30dB @DC~15750MHz 30dB @ 16250~25000MHz	10	SMA-F	-20~+60
² Listed are specific frequency ranges and tailor-made ranges are available. ² Please provide the below information when inquiring and mark * is required. * 1. The specific pass band frequency range * 2. The specific rejection and frequency 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)								

Mechanical Drawing

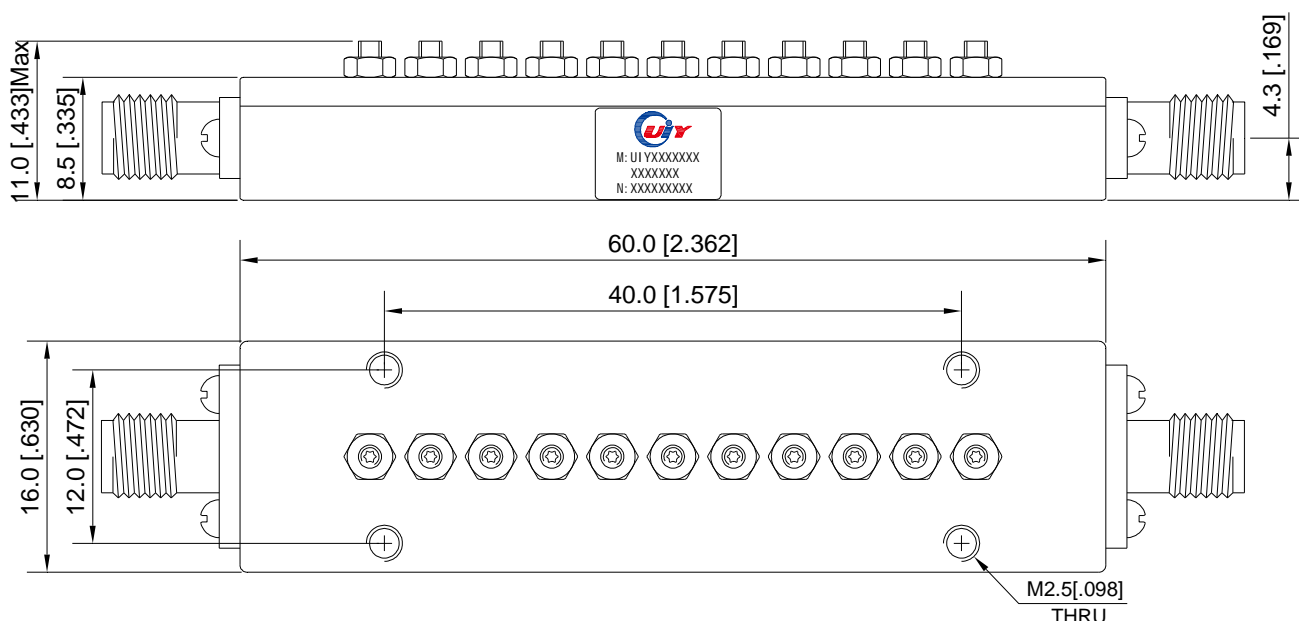

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiyinc.com

E-mail: sales@uiyinc.com