

13.75 to 14.5GHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (GHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF6817A13750T14500	13.75 ~ 14.5	3.0	1.8	30dB @10000~13600MHz 30dB @14650~20000MHz	5	TAB	-40 ~ +85
UIYBPF6817A13750T14500SF	13.75 ~ 14.5	3.0	1.8	30dB @10000~13600MHz 30dB @14650~20000MHz	5	SMA-F	-40 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the below information when inquiring and mark * is required.
 * 1. The specific pass band frequency range
 * 2. The specific rejection and frequency
 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

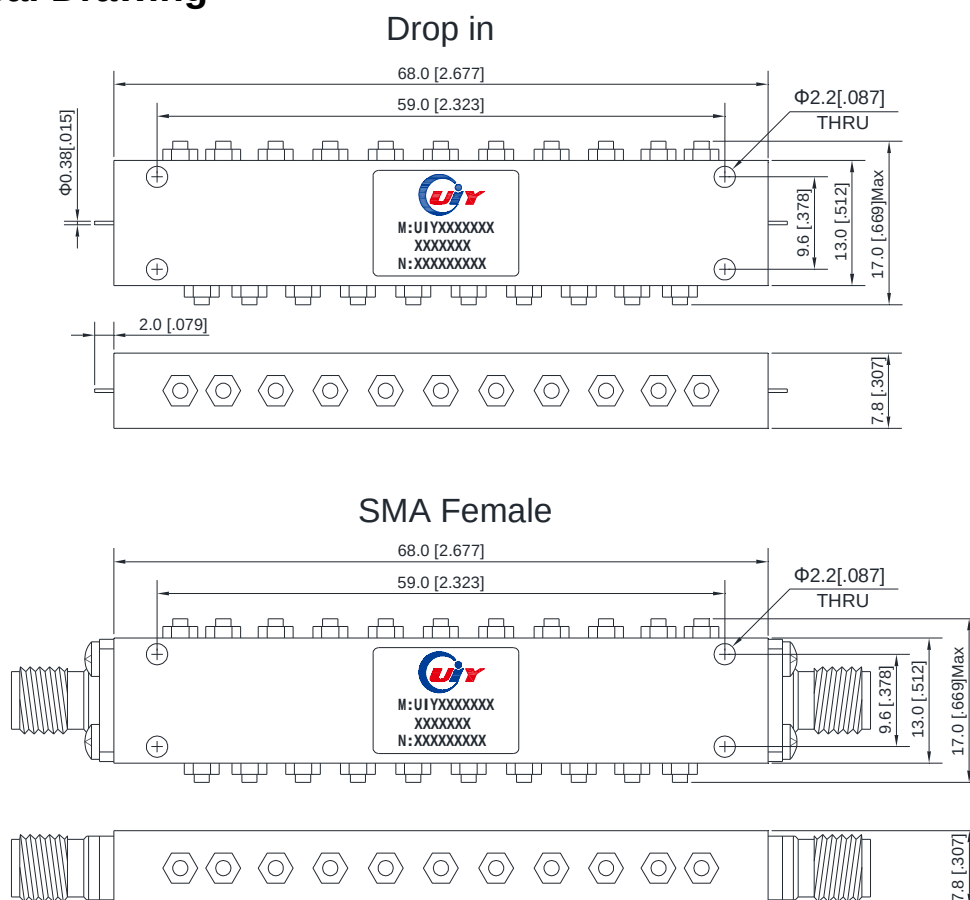

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiyinc.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiyinc.com