

435 to 800MHz – Band Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF8383B435T445SF	435 ~ 445	1.0	0.5	1.3	60dB @DC-390MHz 60dB @490-2000MHz	100	SMA-F	-40 ~ +85
UIYBPF8383B435T445NF	435 ~ 445	1.0	0.5	1.3	60dB @DC-390MHz 60dB @490-2000MHz	100	N-F	-40 ~ +85
UIYBPF8383B450T460NF	450 ~ 460	1.0	0.5	1.3	60dB @DC-405MHz 60dB @505-2000MHz	100	N-F	-40 ~ +85
UIYBPF8383B500T510NF	500 ~ 510	1.0	0.5	1.3	60dB @DC-455MHz 60dB @555-2000MHz	100	N-F	-40 ~ +85
UIYBPF8383B690T700SF	690 ~ 700	1.0	0.5	1.3	60dB @DC-445MHz 60dB @745-2200MHz	100	SMA-F	-40 ~ +85
UIYBPF8383B740T750NF	740 ~ 750	1.0	0.5	1.3	60dB @DC-695MHz 60dB @795-2500MHz	100	N-F	-40 ~ +85
UIYBPF8383B790T800NF	790 ~ 800	1.0	0.5	1.3	60dB @DC-745MHz 60dB @845-2500MHz	100	N-F	-40 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the below information when inquiring and mark * is required.

* 1. The specific pass band frequency range

* 2. The specific rejection and frequency

3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

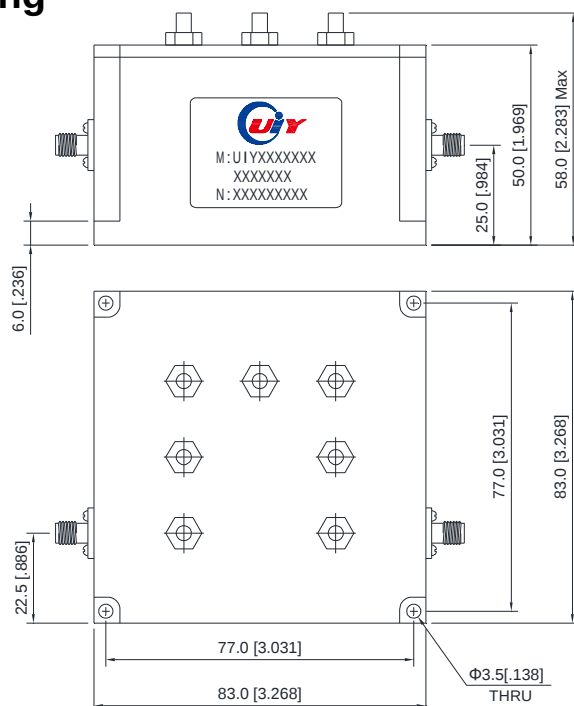

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5