

868-870MHz – Band Stop Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Band Reject Frequency (MHz)	Band Reject Rejection Min(dB)	Pass Frequency (MHz)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type	Temp.(°C)
UIYBSF15867A868T870NF	868 ~ 870	50	DC~821MHz 925~1200MHz	0.5	1.3	50	N-F	-30 ~ +70
UIYBSF15867A868T870SF	868 ~ 870	50	DC~821MHz 925~1200MHz	0.5	1.3	50	SMA-F	-30 ~ +70

² Listed are specific frequency ranges and other tailor-made ranges are available.
² Please provide the below information when inquiring and mark * is required.
 * 1. The specific pass band frequency range.
 * 2. The specific rejection and frequency.
 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.).

Mechanical Drawing

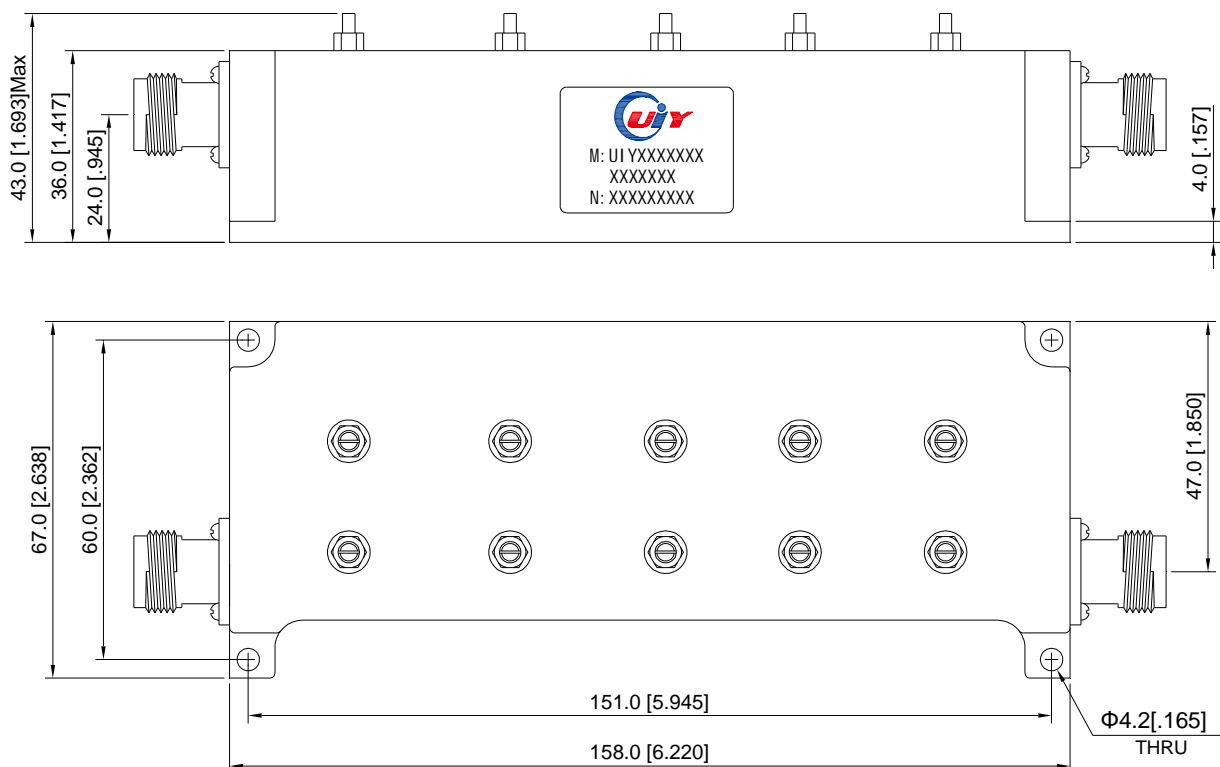

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.0