

460 to 520MHz –Band Stop Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Band Reject Frequency (MHz)	Pass Band Frequency	Band Reject Rejection Min(dB)	Insertion Loss Max(dB)	Passband Ripple	VSWR Max	Power (W)	Connector Type	Temp.(°C)
UIYBSF4012A 460T520SF	460 ~ 520	DC~402MHz 578~2000MHz	65	2.5	2.0	1.8	2	SMA-F	-55 ~ +85

- 2 Listed are specific frequency ranges and other tailor-made ranges are available.
- 2 Please provide the below information when inquiring and mark * is required.
- * 1. The specific pass band frequency range.
 - * 2. The specific rejection and frequency.
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

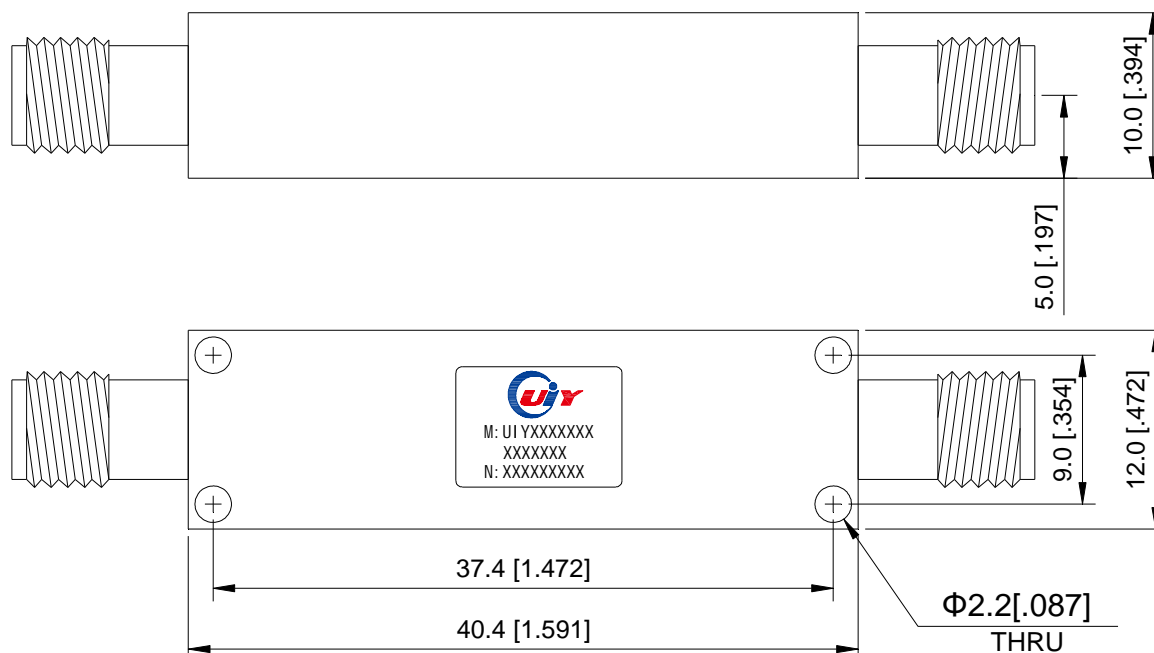

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5