

1500W – Coaxial Attenuator

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics


Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA1500AD3A10	DC-3GHz	1500W	10 dB	±2.0 dB	1.35	7/16-M to 7/16-F	50 Ω
UIYCA1500AD3A20	DC-3GHz	1500W	20 dB	±2.0 dB	1.35	7/16-M to 7/16-F	50 Ω
UIYCA1500AD3A30	DC-3GHz	1500W	30 dB	±2.0 dB	1.35	7/16-M to 7/16-F	50 Ω
UIYCA1500AD3A40	DC-3GHz	1500W	40 dB	±2.5 dB	1.35	7/16-M to 7/16-F	50 Ω
UIYCA1500AD3A60	DC-3GHz	1500W	60 dB	±2.5 dB	1.35	7/16-M to 7/16-F	50 Ω
UIYCA1500ADMTNF3A10	DC-3GHz	1500W	10 dB	±2.0 dB	1.35	7/16-M to N-F	50 Ω
UIYCA1500ADMTNF3A20	DC-3GHz	1500W	20 dB	±2.0 dB	1.35	7/16-M to N-F	50 Ω
UIYCA1500ADMTNF3A30	DC-3GHz	1500W	30 dB	±2.0 dB	1.35	7/16-M to N-F	50 Ω
UIYCA1500ADMTNF3A40	DC-3GHz	1500W	40 dB	±2.5 dB	1.35	7/16-M to N-F	50 Ω
UIYCA1500ADMTNF3A60	DC-3GHz	1500W	60 dB	±2.5 dB	1.35	7/16-M to N-F	50 Ω
UIYCA1500ADFTNF3A40	DC-3GHz	1500W	40 dB	±2.5 dB	1.35	7/16-F to N-F	50 Ω
UIYCA1500ADFTNM3A30	DC-3GHz	1500W	30 dB	±2.0 dB	1.35	7/16-F to N-M	50 Ω

² Listed are specific frequency ranges and tailor-made ranges are available.

² Please provide the information below when inquiring and mark * is required.

- * 1. Power handling, Attenuation Value
- 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
- 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

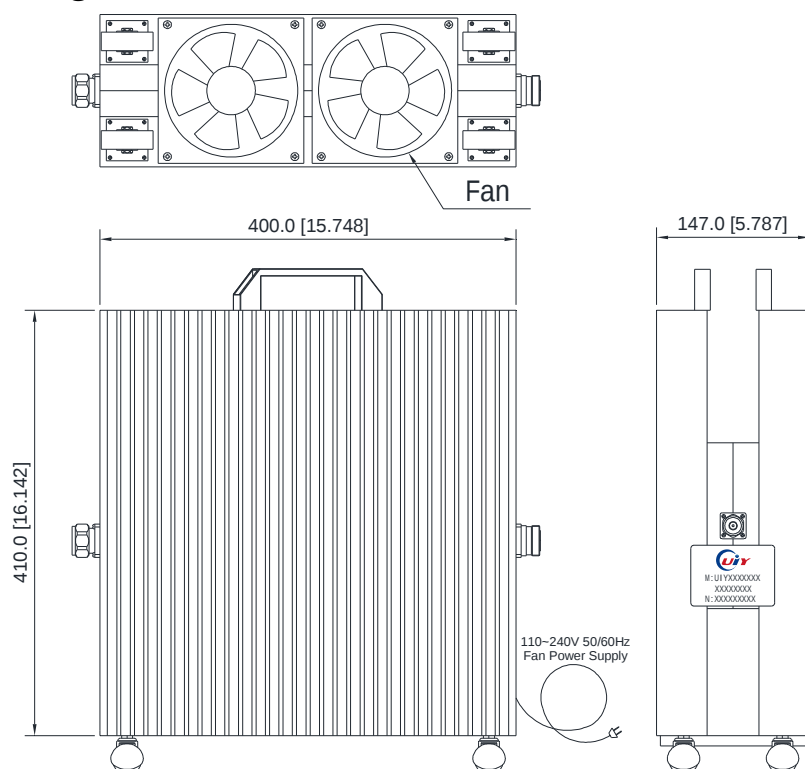

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.0