

30W 40GHz – 2.92mm Coaxial Attenuator

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA30AK40A3	DC-40GHz	30W	3 dB	-1.5/+4.5 dB	1.35	2.92-M / 2.92-F	50 Ω
UIYCA30AK40A6		30W	6 dB	-2.5/+4.5 dB	1.35	2.92-M / 2.92-F	50 Ω
UIYCA30AK40A10		30W	10 dB	-2.0/+4.8 dB	1.35	2.92-M / 2.92-F	50 Ω
UIYCA30AK40A20		30W	20 dB	-2.5/+3.5 dB	1.35	2.92-M / 2.92-F	50 Ω
UIYCA30AK40A30		30W	30 dB	-2.5/+3.0 dB	1.35	2.92-M / 2.92-F	50 Ω

² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the information below when inquiring and mark * is required.
 * 1. Power handling, Attenuation Value
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

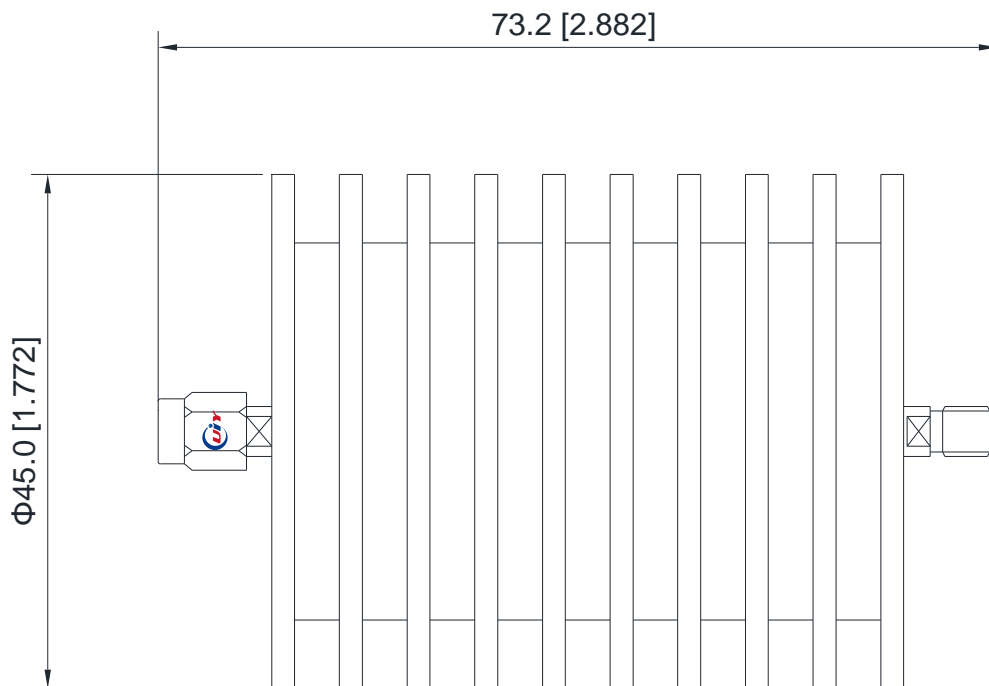

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.0

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiyinc.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiyinc.com