

5W 40GHz 2.92mm – Coaxial Attenuator

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA5AK40A1	DC-40GHz	5W	1 dB	±1.0 dB	1.4	2.92-M / 2.92-F	50 Ω
UIYCA5AK40A2		5W	2 dB	±1.0 dB	1.4	2.92-M / 2.92-F	50 Ω
UIYCA5AK40A3		5W	3 dB	±1.0 dB	1.4	2.92-M / 2.92-F	50 Ω
UIYCA5AK40A4		5W	4 dB	±1.0 dB	1.4	2.92-M / 2.92-F	50 Ω
UIYCA5AK40A5		5W	5 dB	±1.0 dB	1.4	2.92-M / 2.92-F	50 Ω
UIYCA5AK40A6		5W	6 dB	±1.0 dB	1.4	2.92-M / 2.92-F	50 Ω
UIYCA5AK40A7		5W	7 dB	±1.0 dB	1.4	2.92-M / 2.92-F	50 Ω
UIYCA5AK40A8		5W	8 dB	±1.0 dB	1.4	2.92-M / 2.92-F	50 Ω
UIYCA5AK40A9		5W	9 dB	±1.0 dB	1.4	2.92-M / 2.92-F	50 Ω
UIYCA5AK40A10		5W	10 dB	±1.0 dB	1.4	2.92-M / 2.92-F	50 Ω
UIYCA5AK40A20		5W	20 dB	±1.3 dB	1.4	2.92-M / 2.92-F	50 Ω
UIYCA5AK40A30		5W	30 dB	±1.4 dB	1.4	2.92-M / 2.92-F	50 Ω

² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the information below when inquiring and mark * is required.
 * 1. Power handling, Attenuation Value
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

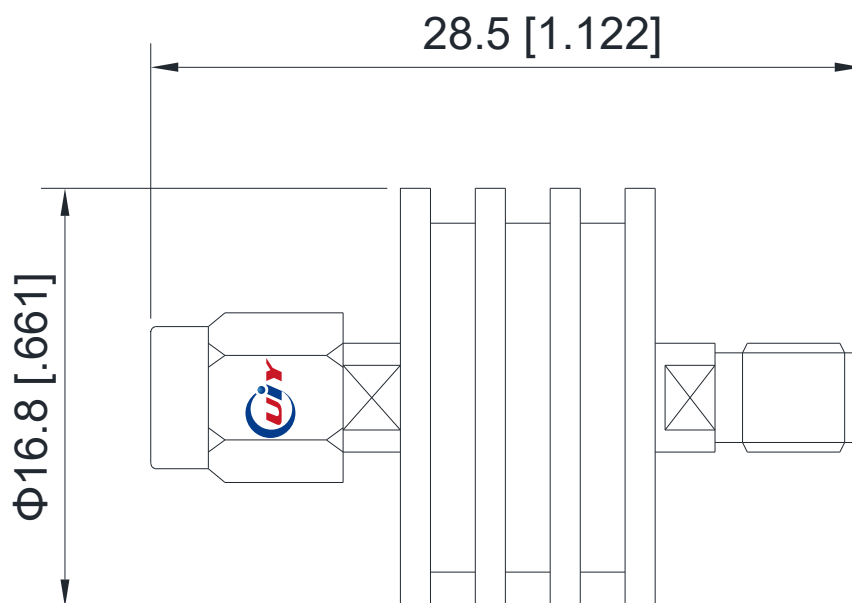

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5.0