

5W 6GHz SMA – Coaxial Attenuator

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA5AS3A1	DC-3GHz	5W	1 dB	±0.5 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA5AS3A2		5W	2 dB	±0.5 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA5AS3A3		5W	3 dB	±0.5 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA5AS3A5		5W	5 dB	±0.5 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA5AS3A10		5W	10 dB	±0.5 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA5AS3A20		5W	20 dB	±0.5 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA5AS3A30		5W	30 dB	±0.6 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA5AS6A1	DC-6GHz	5W	1 dB	±0.6 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA5AS6A2		5W	2 dB	±0.6 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA5AS6A3		5W	3 dB	±0.6 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA5AS6A5		5W	5 dB	±0.8 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA5AS6A10		5W	10 dB	±0.8 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA5AS6A20		5W	20 dB	±1.0 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA5AS6A30		5W	30 dB	±1.5 dB	1.3	SMA-M / SMA-F	50 Ω

- ² Listed are specific frequency ranges and tailor-made ranges are available.
- ² Please provide the information below when inquiring and mark * is required.
- * 1. Power handling, Attenuation Value
 - 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 - 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

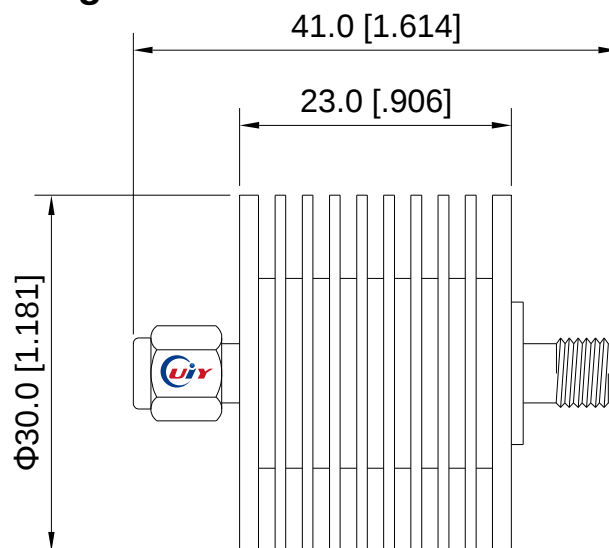

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5.1

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiyinc.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiyinc.com