



150W - Coaxial Termination

Design Features


- ◆ High RF performance, ultra-competitive price.
- Military, space and commercial applications.
- Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range	Power	VSWR Max	Connector Type	Impedance
UIYCT150AN3	DC-3GHz	150W	1.15	N Male	50 Ω
UIYCT150ANF3	DC-3GHz	150W	1.2	N Female	50 Ω
UIYCT150AN6	DC-6GHz	150W	1.25	N Male	50 Ω
UIYCT150ANF6	DC-6GHz	150W	1.25	N Female	50 Ω

- ² Listed are specific frequency ranges and tailor-made ranges available.
- ² Please provide the information below when inquiring and mark * is required.
 - * 1. Power handling
 - 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 - 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

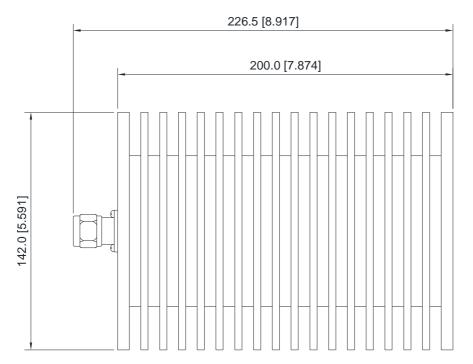



Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China. Tel: +86-755-83748888 +86-755-25999990 Fax: +86-755-25999959

Web: www.uiyinc.com E-mail: sales@uiyinc.com