

2W SMA – Coaxial Termination

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range	Power	VSWR Max	Connector Type	Impedance
UIYCT2AS3	DC-3GHz	2W	1.07	SMA Male	50 Ω
UIYCT2ASF3		2W	1.07	SMA Female	50 Ω
UIYCT2AS6	DC-6GHz	2W	1.10	SMA Male	50 Ω
UIYCT2ASF6		2W	1.10	SMA Female	50 Ω
UIYCT2AS8	DC-8GHz	2W	1.15	SMA Male	50 Ω
UIYCT2ASF8		2W	1.15	SMA Female	50 Ω
UIYCT2AS124	DC-12.4GHz	2W	1.15	SMA Male	50 Ω
UIYCT2ASF124		2W	1.15	SMA Female	50 Ω
UIYCT2AS18	DC-18GHz	2W	1.2	SMA Male	50 Ω

- ² Listed are specific frequency ranges and tailor-made ranges available.
² Please provide the information below when inquiring and mark * is required.
 * 1. Power handling
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

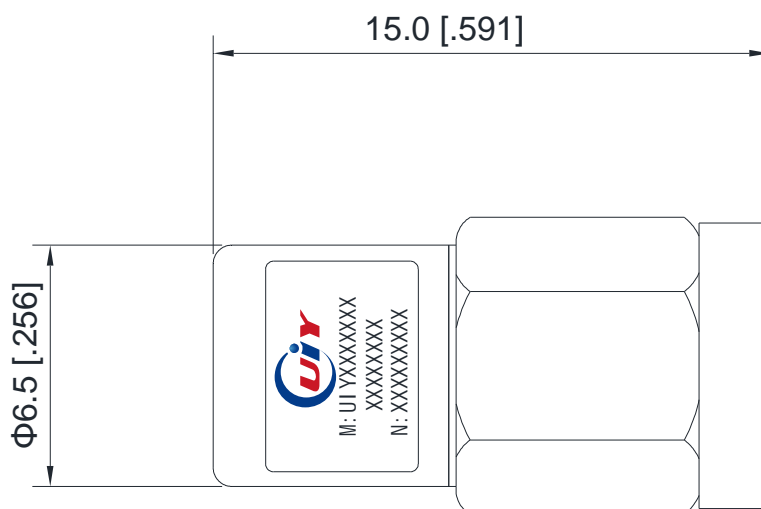

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiyinc.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiyinc.com