

500 to 2500MHz – Directional Coupler

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model No.	Freq.Range (GHz)	Nominal Coupling(dB)	Flatness (dB)	IL. (dB)	Directivity (dB)	VSWR	Power (W)	Connector Type	Temp. (°C)
UIYDCP13315A500T2500C10SF	0.5~2.5	10±1	±0.7	0.8	18	1.25	50	SMA-F	-55~+85
UIYDCP13315A500T2500C20SF	0.5~2.5	20±1	±0.7	0.5	18	1.25	50	SMA-F	-55~+85
UIYDCP13315A500T2500C30SF	0.5~2.5	30±1	±0.7	0.5	18	1.25	50	SMA-F	-55~+85

² Listed are specific frequency ranges and tailor-made ranges are available.

² Please provide the information below when inquiring and mark * is required.


* 1. The specific frequency ranges

* 2. Power handling (Forward, Reverse, Peak, etc.)

* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)

* 4. Other special requests (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

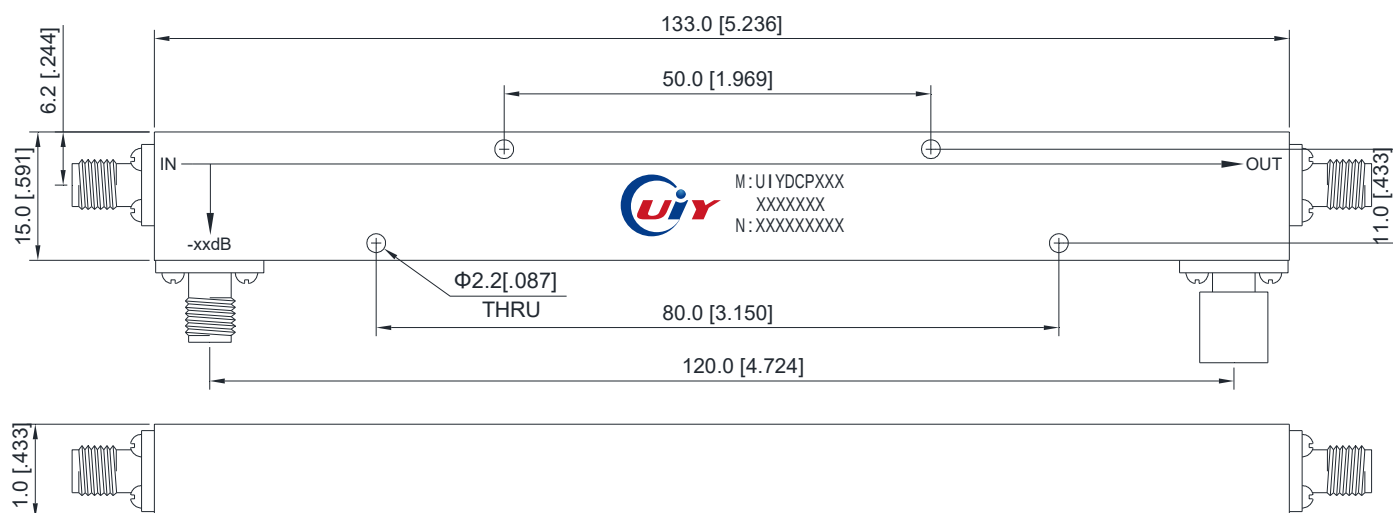

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiyinc.com

E-mail: sales@uiyinc.com