

130 to 900MHz – 3 Port Dual Junction Drop in Circulator

Design Features

- ◆ Can be Dual Junction or Multiple for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDDC11256A145T150	136 ~ 150	1.0	36	1.3	300	300	TAB	-10 ~ +60
UIYDDC11256A150T155	150 ~ 155	1.0	40	1.25	300	300	TAB	-10 ~ +70
UIYDDC11256A150T170	150 ~ 170	1.2	36	1.3	300	300	TAB	-10 ~ +70
UIYDDC11256A168T171	168 ~ 171	0.8	46	1.2	300	300	TAB	-30 ~ +70
UIYDDC11256A170T200	170 ~ 200	1.4	36	1.3	300	300	TAB	-30 ~ +70
UIYDDC11256A180T220	180 ~ 220	1.0	36	1.3	300	300	TAB	-30 ~ +70
UIYDDC11256A192T232	192 ~ 232	0.8	40	1.25	300	300	TAB	-30 ~ +70
UIYDDC11256A1975T2075	197.5 ~ 207.5	0.8	46	1.2	300	300	TAB	-30 ~ +70
UIYDDC11256A200T250	200 ~ 250	1.2	40	1.25	300	300	TAB	-30 ~ +70
UIYDDC11256A230T250	230 ~ 250	0.6	46	1.2	300	300	TAB	-30 ~ +70
UIYDDC11256A250T300	250 ~ 300	0.8	40	1.25	300	300	TAB	-30 ~ +70
UIYDDC11256A500T750	500 ~ 750	1.0	32	1.4	300	300	TAB	-30 ~ +70
UIYDDC11256A600T900	600 ~ 900	1.0	34	1.35	300	300	TAB	-30 ~ +70

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the information below when inquiring and mark * is required.

* 1. The specific frequency ranges

- * 2. Power handling (Forward, Reverse, Peak, etc.)

3. Other special requests (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

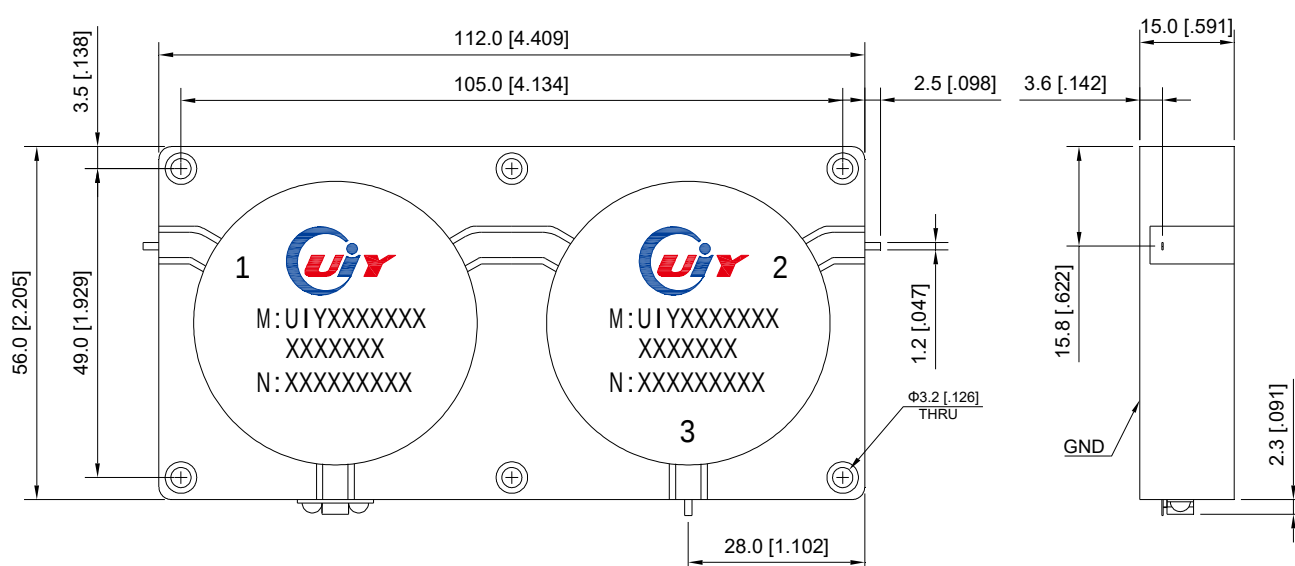

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiyinc.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiyinc.com