

200 to 3600MHz – 4 Port Dual Junction Drop in Circulator


Design Features

- ◆ Can be Dual Junction or Multiple for high isolation.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss (1-2 & 3-4) Max(dB)	Isolation (2-1 & 4-3) Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDDC5025A4P210T220	210 ~ 220	1.2	36	1.3	200	200	TAB	-40 ~ +85
UIYDDC5025A4P220T230	220 ~ 230	1.0	36	1.3	200	200	TAB	-40 ~ +85
UIYDDC5025A4P250T270	250 ~ 270	1.0	36	1.3	200	200	TAB	-40 ~ +85
UIYDDC5025A4P300T320	300 ~ 320	1.0	40	1.25	200	200	TAB	-40 ~ +85
UIYDDC5025A4P350T370	350 ~ 370	0.8	40	1.25	200	200	TAB	-40 ~ +85
UIYDDC5025A4P380T460	380 ~ 460	1.0	34	1.35	200	200	TAB	-40 ~ +85
UIYDDC5025A4P400T470	400 ~ 470	0.5	18	1.3	200	200	TAB	-40 ~ +85
UIYDDC5025A4P410T425	410 ~ 425	0.6	46	1.15	200	200	TAB	-40 ~ +85
UIYDDC5025A4P430T470	430 ~ 470	0.8	40	1.25	200	200	TAB	-40 ~ +85
UIYDDC5025A4P450T520	450 ~ 520	1.0	40	1.25	200	200	TAB	-40 ~ +85
UIYDDC5025A4P490T510	490 ~ 510	0.5	46	1.15	200	200	TAB	-40 ~ +85
UIYDDC5025A4P600T700	600 ~ 700	0.6	40	1.2	200	200	TAB	-40 ~ +85
UIYDDC5025A4P700T803	700 ~ 803	0.6	46	1.2	200	200	TAB	-40 ~ +85
UIYDDC5025A4P800T1000	800 ~ 1000	1.0	36	1.3	200	200	TAB	-40 ~ +85
UIYDDC5025A4P860T960	860 ~ 960	0.6	40	1.25	200	200	TAB	-40 ~ +85
UIYDDC5025A4P869T894	869 ~ 894	0.4	50	1.15	200	200	TAB	-40 ~ +85
UIYDDC5025A4P925T960	925 ~ 960	0.4	50	1.15	200	200	TAB	-40 ~ +85
UIYDDC5025A4P950T1250	950 ~ 1250	1.0	36	1.3	200	200	TAB	-40 ~ +85
UIYDDC5025A4P1200T1400	1200 ~ 1400	0.6	46	1.2	200	200	TAB	-40 ~ +85
UIYDDC5025A4P1500T1700	1500 ~ 1700	0.6	46	1.2	200	200	TAB	-40 ~ +85
UIYDDC5025A4P1710T2170	1710 ~ 2170	0.8	40	1.25	200	200	TAB	-40 ~ +85
UIYDDC5025A4P1805T1880	1805 ~ 1880	0.4	50	1.15	200	200	TAB	-40 ~ +85
UIYDDC5025A4P1920T1990	1920 ~ 1990	0.4	50	1.15	200	200	TAB	-40 ~ +85
UIYDDC5025A4P2000T2500	2000 ~ 2500	1.0	40	1.25	200	200	TAB	-40 ~ +85
UIYDDC5025A4P2300T2500	2300 ~ 2500	0.5	46	1.15	200	200	TAB	-40 ~ +85
UIYDDC5025A4P2300T2700	2300 ~ 2700	0.6	46	1.2	200	200	TAB	-40 ~ +85
UIYDDC5025A4P2400T2600	2400 ~ 2600	0.5	46	1.15	200	200	TAB	-40 ~ +85
UIYDDC5025A4P2496T2690	2496 ~ 2690	0.5	46	1.15	200	200	TAB	-40 ~ +85
UIYDDC5025A4P2500T2700	2500 ~ 2700	0.5	46	1.15	200	200	TAB	-40 ~ +85
UIYDDC5025A4P2700T3100	2700 ~ 3100	0.5	46	1.15	200	200	TAB	-40 ~ +85
UIYDDC5025A4P3000T3600	3000 ~ 3600	0.6	40	1.25	200	200	TAB	-40 ~ +85

Mechanical Drawing

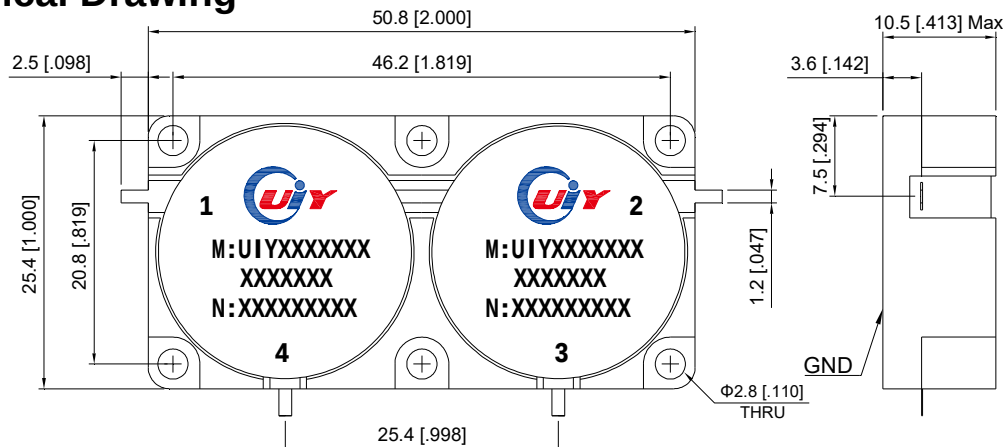

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.3