

200 to 1875MHz – Drop in Isolator


Design Features

- ◆ Can be Dual Junction or Multi-Junction for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDI3546A220T240	220 ~ 240	0.65	18	1.3	300	150	TAB	-20 ~ +65
UIYDI3546A240T260	240 ~ 260	0.5	18	1.3	300	150	TAB	-20 ~ +65
UIYDI3546A260T280	260 ~ 280	0.5	20	1.25	300	150	TAB	-20 ~ +65
UIYDI3546A309T339	309 ~ 339	0.4	20	1.25	300	150	TAB	-20 ~ +65
UIYDI3546A350T370	350 ~ 370	0.35	21	1.2	300	150	TAB	-20 ~ +65
UIYDI3546A380T460	380 ~ 460	0.5	18	1.3	300	150	TAB	-30 ~ +70
UIYDI3546A390T410	390 ~ 410	0.3	23	1.2	300	150	TAB	-30 ~ +70
UIYDI3546A400T470	400 ~ 470	0.4	20	1.25	300	150	TAB	-30 ~ +70
UIYDI3546A413T419	413 ~ 419	0.3	30	1.15	300	150	TAB	-30 ~ +70
UIYDI3546A419T425	419 ~ 425	0.3	30	1.15	300	150	TAB	-30 ~ +70
UIYDI3546A440T470	440 ~ 470	0.3	23	1.2	300	150	TAB	-30 ~ +70
UIYDI3546A450T520	450 ~ 520	0.4	20	1.25	300	150	TAB	-30 ~ +70
UIYDI3546A600T800	600 ~ 800	0.5	19	1.25	300	150	TAB	-30 ~ +70
UIYDI3546A700T900	700 ~ 900	0.4	20	1.25	300	150	TAB	-30 ~ +70
UIYDI3546A700T1000	700 ~ 1000	0.6	16	1.4	300	150	TAB	-20 ~ +65
UIYDI3546A770T860	770 ~ 860	0.3	23	1.2	300	150	TAB	-40 ~ +85
UIYDI3546A860T872	860 ~ 872	0.25	30	1.15	300	150	TAB	-30 ~ +70
UIYDI3546A900T930	900 ~ 930	0.2	30	1.15	300	150	TAB	-30 ~ +70
UIYDI3546A1000T1300	1000 ~ 1300	0.4	20	1.25	300	150	TAB	-40 ~ +85
UIYDI3546A1100T1700	1100 ~ 1700	0.5	15	1.45	300	150	TAB	-40 ~ +85
UIYDI3546A1296T1298	1296 ~ 1298	0.2	30	1.15	300	150	TAB	-40 ~ +85

Mechanical Drawing

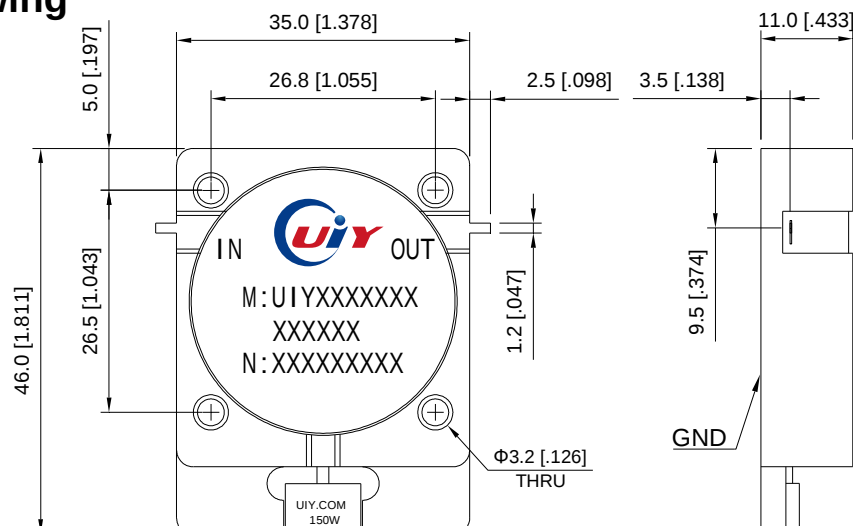

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.2

200 to 1875MHz – Drop in Isolator


Design Features

- ◆ Can be Dual Junction or Multi-Junction for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDI3546A220T240A30	220 ~ 240	0.65	18	1.3	300	100-30dB	TAB	-20 ~ +65
UIYDI3546A240T260A30	240 ~ 260	0.5	18	1.3	300	100-30dB	TAB	-20 ~ +65
UIYDI3546A260T280A30	260 ~ 280	0.5	20	1.25	300	100-30dB	TAB	-20 ~ +65
UIYDI3546A309T339A30	309 ~ 339	0.4	20	1.25	300	100-30dB	TAB	-20 ~ +65
UIYDI3546A350T370A30	350 ~ 370	0.35	21	1.2	300	100-30dB	TAB	-20 ~ +65
UIYDI3546A380T460A30	380 ~ 460	0.5	18	1.3	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A390T410A30	390 ~ 410	0.3	23	1.2	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A400T470A30	400 ~ 470	0.4	20	1.25	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A413T419A30	413 ~ 419	0.3	30	1.15	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A419T425A30	419 ~ 425	0.3	30	1.15	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A440T470A30	440 ~ 470	0.3	23	1.2	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A450T520A30	450 ~ 520	0.4	20	1.25	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A600T800A30	600 ~ 800	0.5	19	1.25	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A700T900A30	700 ~ 900	0.4	20	1.25	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A700T1000A30	700 ~ 1000	0.6	16	1.4	300	100-30dB	TAB	-20 ~ +65
UIYDI3546A770T860A30	770 ~ 860	0.3	23	1.2	300	100-30dB	TAB	-40 ~ +85
UIYDI3546A860T872A30	860 ~ 872	0.25	30	1.15	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A900T930A30	900 ~ 930	0.2	30	1.15	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A1000T1300A30	1000 ~ 1300	0.4	20	1.25	300	100-30dB	TAB	-40 ~ +85
UIYDI3546A1100T1700A30	1100 ~ 1700	0.5	15	1.45	300	100-30dB	TAB	-40 ~ +85
UIYDI3546A1296T1298A30	1296 ~ 1298	0.2	30	1.15	300	100-30dB	TAB	-40 ~ +85

Mechanical Drawing

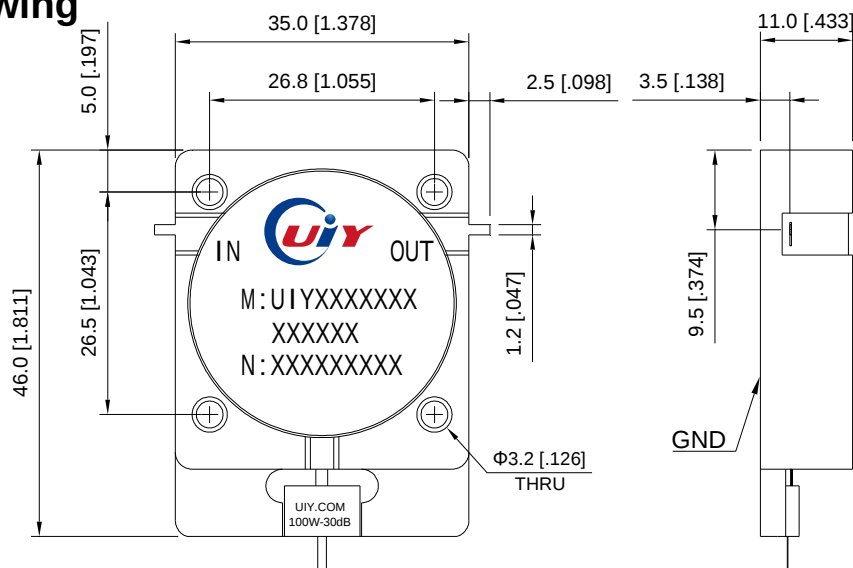

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.2