

300 to 1500MHz 500W– Drop in Isolator

Design Features


- ◆ Can be Dual Junction or Multi-Junction for high isolation.
- ◆ Military, space and commercial applications.
- ◆ High RF performance, ultra-competitive price.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDI5356A300T350	300 ~ 350	0.5	20	1.25	500	30	TAB	-30 ~ +70
UIYDI5356A350T400	350 ~ 400	0.5	20	1.25	500	30	TAB	-30 ~ +70
UIYDI5356A400T500	400 ~ 500	0.4	20	1.25	500	30	TAB	-30 ~ +70
UIYDI5356A450T500	450 ~ 512	0.3	23	1.2	500	30	TAB	-30 ~ +70
UIYDI5356A500T590	500 ~ 590	0.3	23	1.2	500	30	TAB	-40 ~ +85
UIYDI5356A590T710	590 ~ 710	0.4	20	1.25	500	30	TAB	-40 ~ +85
UIYDI5356A700T900	700 ~ 900	0.3	23	1.2	500	30	TAB	-40 ~ +85
UIYDI5356A800T1000	800 ~ 1000	0.25	23	1.2	500	30	TAB	-40 ~ +85
UIYDI5356A900T1200	900 ~ 1200	0.3	23	1.2	300	30	TAB	0 ~ +65
UIYDI5356A960T1215	960 ~ 1215	0.3	23	1.2	300	30	TAB	0 ~ +65
UIYDI5356A1200T1400	1200 ~ 1400	0.2	25	1.15	300	30	TAB	0 ~ +65

- 2 Listed are specific frequency ranges and tailor-made ranges are available.
2 Please provide the information below when inquiring and mark * is required.
- * 1. The specific frequency ranges
 - * 2. Power handling (Forward, Reverse, Peak, etc.)
 - 3. Other special requests (Insertion Loss, Isolation, VSWR, Temperature, Dimension etc.)

Mechanical Drawing

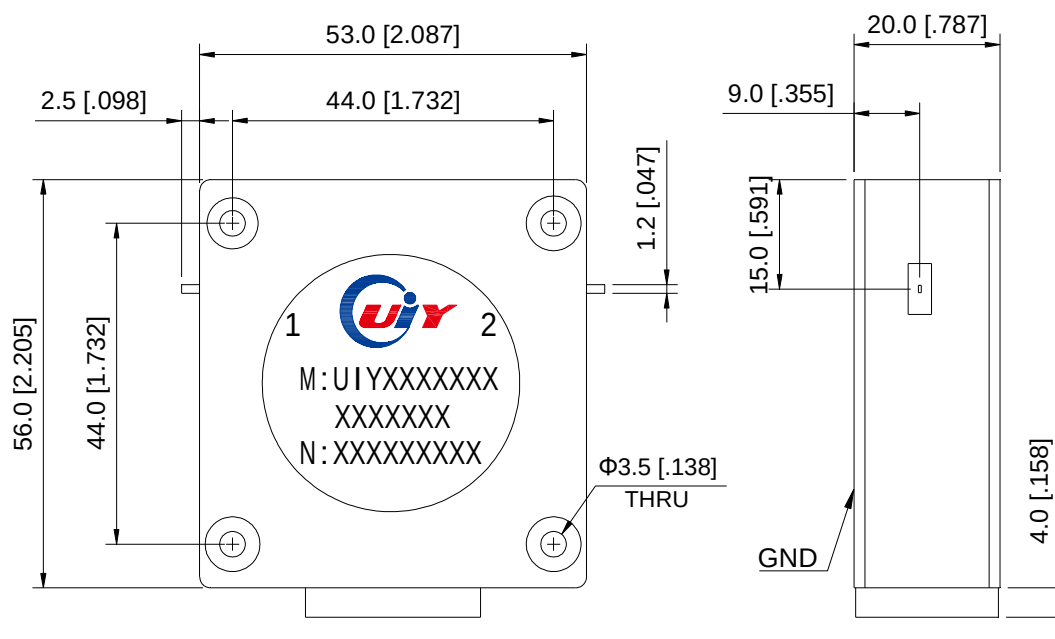

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1