1662 to 1667MHz – Duplexer / Diplexer

Design Features

- High RF performance, ultra-competitive price.
- Military, space and commercial applications.
- Custom design available upon request.
- Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (MHz)		Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Power(W)	Connector Type	Temp.(℃)
UIYDX121175A1662T1667NF	CH1	1662	3.0	50	1.3	50	N-F	-30 ~ +70
	CH2	1667						

- Listed are specific frequency ranges and tailor-made ranges are available.
- Please provide the information below when inquiring and mark * is must.
  * 1. The specific frequency range TX and RX
  * 2. Insertion Loss, Isolation, VSWR
  3. Other special requests (Power handling, Temperature, Dimension, etc.)

Mechanical Drawing

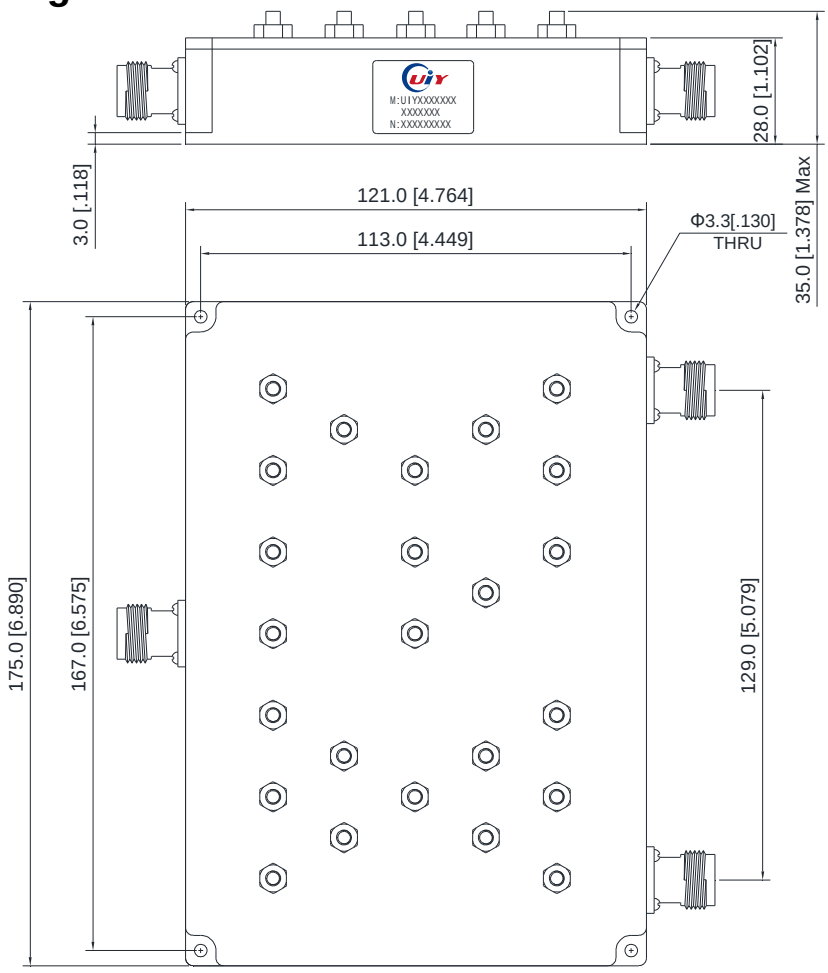

Unit: mm/ inch, General part tolerance is ±0.2mm unless otherwise stated.

Ver. 5.1

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China. Web: www.uiyinc.com
Tel: +86-755-83748888 +86-755-25999990 Fax: +86-755-25999959 E-mail: sales@uiyinc.com