

449 to 485MHz – Duplexer / Diplexer

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (MHz)		Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYDX290120A449T485SF	CH1	449 ~ 452	1.0 (Ripple<0.3)	65	1.3	65dB @0.47-2.0GHz	50	SMA-F	-40 ~ +85
	CH2	470 ~ 485	0.6 (Ripple<0.3)			65dB @DC-452MHz			
UIYDX290120A449T485NF	CH1	449 ~ 452	1.0 (Ripple<0.3)	65	1.3	65dB @0.47-2.0GHz	50	N-F	-40 ~ +85
	CH2	470 ~ 485	0.6 (Ripple<0.3)			65dB @DC-452MHz			

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the information below when inquiring and mark * is must.

* 1. The specific frequency range TX and RX

* 2. Insertion Loss, Isolation, VSWR

3. Other special requests (Power handling, Temperature, Dimension, etc.)

Mechanical Drawing

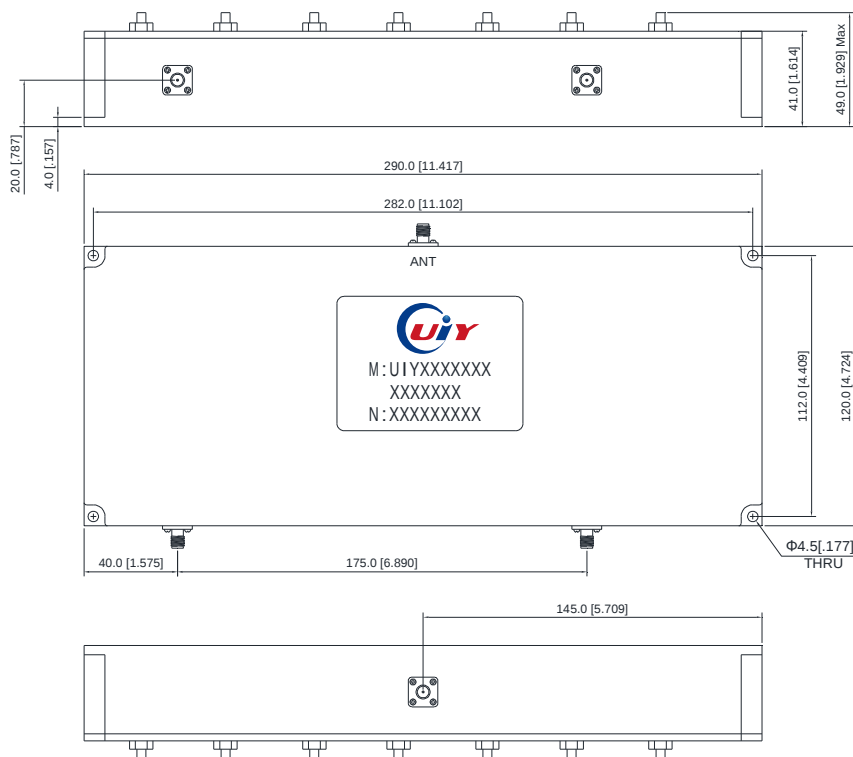

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiyinc.com

E-mail: sales@uiyinc.com