

840 to 1444MHz – Duplexer / Diplexer

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (MHz)		Insertion Loss Max(dB)	Ripple Max(dB)	Isolation Min(dB)	VSWR Max	Power (W)	Connector Type	Temp.(°C)
UIYDX8862A840T1444SF	CH1	840 ~ 845	1.0	0.5	60	1.3	50	SMA-F	-30 ~ +70
	CH2	1430 ~ 1444							
UIYDX8862A840T1444NF	CH1	840 ~ 845	1.0	0.5	60	1.3	50	N-F	-30 ~ +70
	CH2	1430 ~ 1444							

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the information below when inquiring and mark * is must.

* 1. The specific frequency range TX and RX

* 2. Insertion Loss, Isolation, VSWR

3. Other special requests (Power handling, Temperature, Dimension, etc.)

Mechanical Drawing

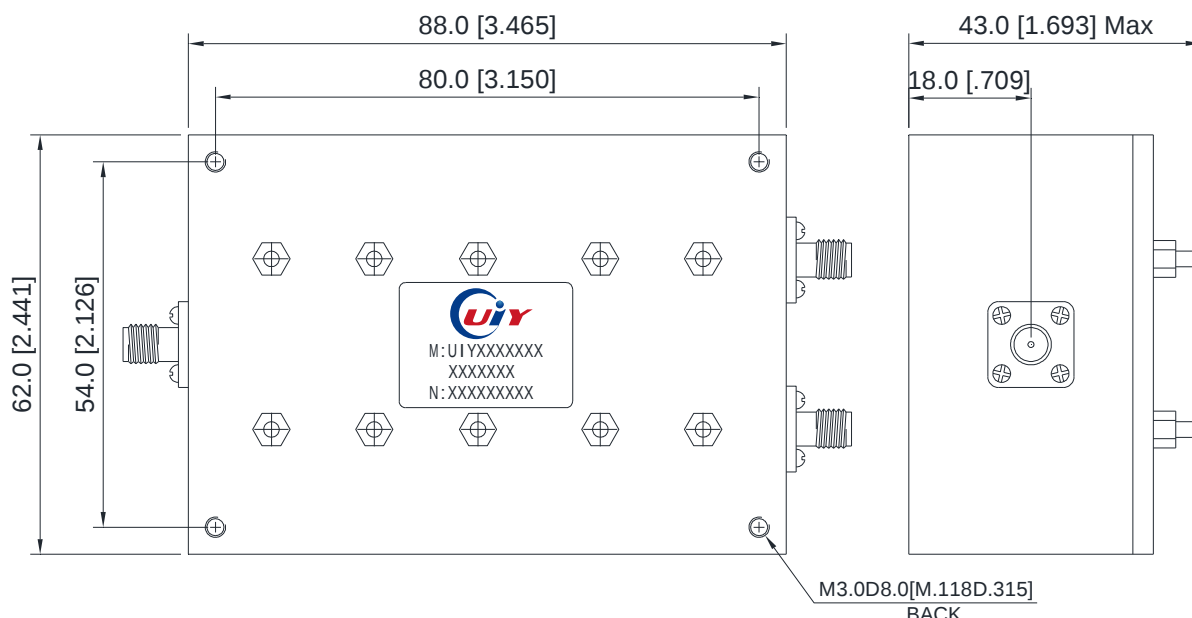

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiyinc.com

E-mail: sales@uiyinc.com