



3 to 18GHz - High Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- Custom design available upon request.
- Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (GHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYHPF3228A3T18SF	3.0 ~ 18.0	1.5dB Ripple 1.2dB	1.8	50dB @DC-2.5GHz	10	SMA-F	-40 ~ +85

- 2 Listed are specific frequency ranges and tailor-made ranges are available.
- Please provide the below information when inquiring and mark * is required.
 - * 1. The specific pass band frequency range
 - * 2. The specific rejection and frequency
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

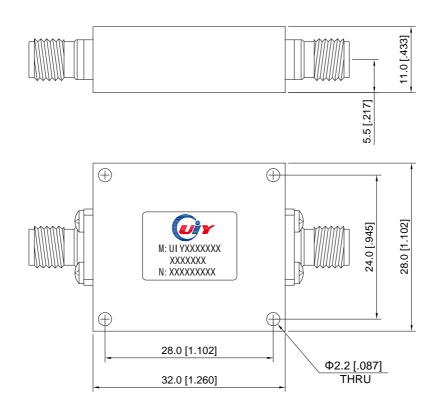

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5

Web: www.uiyinc.com

E-mail: sales@uiyinc.com

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990 Fax: +86-755-25999959