

800 to 4000MHz – High Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Ripple Max(dB)	Isolation Min(dB)	VSWR Max	Power (W)	Connector Type	Temp.(°C)
UIYHPF7191A800T4000NF	800 ~ 4000	1.2	0.5	60dB @DC-600MHz	1.8	50	N-F	-30 ~ +70
UIYHPF7191A800T4000SF	800 ~ 4000	1.2	0.5	60dB @DC-600MHz	1.8	50	SMA-F	-30 ~ +70

² List are specify frequency range and other ranges available.


² Please enter below information when inquiry and mark * is must.

* 1. The specific frequency range TX and RX

* 2. Insertion Loss, Isolation, VSWR

3. Other special request if have (Power handling, Temperature, Dimension, etc.)

Mechanical Drawing

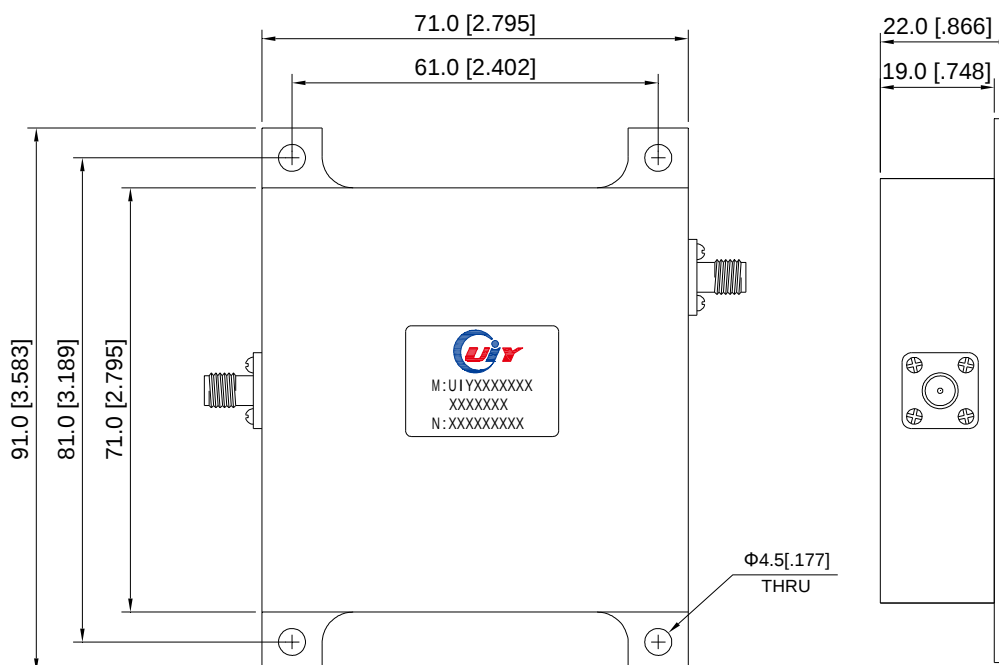

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

3/F, Building A5, Shenbao Power Industrial Park, Shenzhen 518116, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiyinc.com

E-mail: sales@uiyinc.com