

DC-3600MHz – Low Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

| Model Number | Pass Band (MHz) | Insertion Loss Max(dB) | VSWR Max | Rejection | Power (W) | Connector Type | Temp.(°C) |
|-------------------|-----------------|------------------------|----------|--------------------|-----------|----------------|-----------|
| UIYLPF9923A3600SF | DC-3600 | 1.0 | 1.8 | 45dB @4300-8000MHz | 100 | SMA-F | -30 ~ +70 |
| UIYLPF9923A3600NF | DC-3600 | 1.0 | 1.8 | 45dB @4300-8000MHz | 100 | N-F | -30 ~ +70 |

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the below information when inquiring and mark * is required.

* 1. The specific pass band frequency range

* 2. The specific rejection and frequency

3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

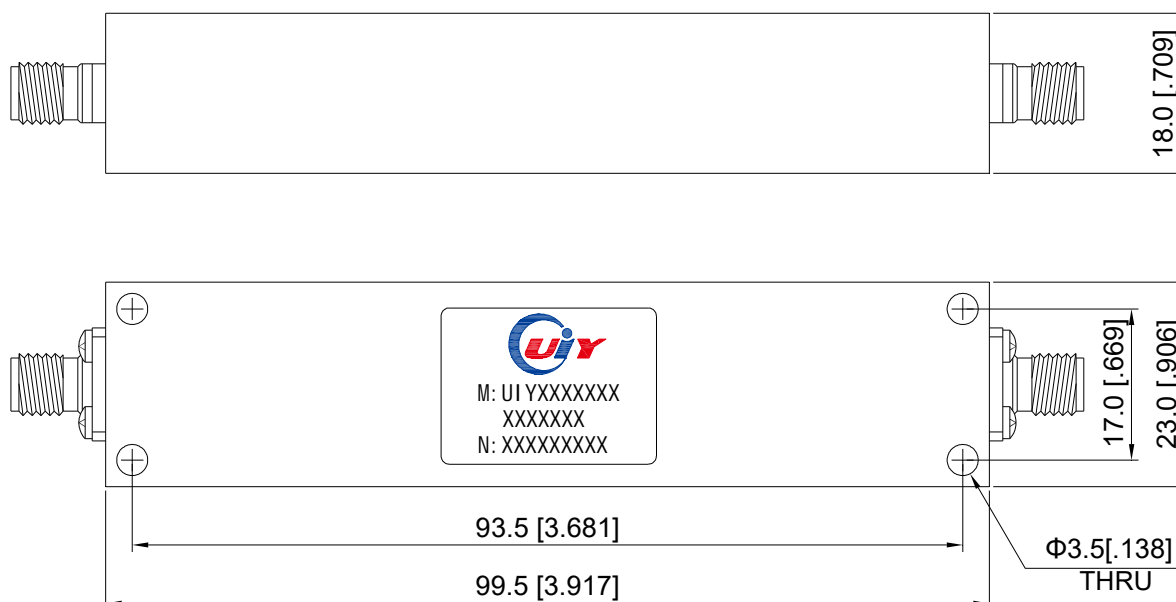

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiyinc.com

E-mail: sales@uiyinc.com