

1710 to 1920MHz – Triplexer

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics


Model Number	Freq. Range (MHz)		Insertion Loss Max(dB)	Ripple Max (dB)	Isolation Min(dB)	Rejection	VSWR Max	Power (W)	Connector Type	Temp.(°C)
UIYTX120120A 1710T1920SF	CH1	1710 ~ 1735	1.5	1.0	50	50dB@DC~1610MHz 50dB@1805~2700MHz	1.3	50	SMA-F	-30 ~ +70
	CH2	1805 ~ 1830				50dB@DC~1735MHz 50dB@1880~2700MHz				
	CH3	1880 ~ 1920				50dB@DC~1830MHz 50dB@2100~2700MHz				
UIYTX120120A 1710T1920NF	CH1	1710 ~ 1735	1.5	1.0	50	50dB@DC~1610MHz 50dB@1805~2700MHz	1.3	50	N-F	-30 ~ +70
	CH2	1805 ~ 1830				50dB@DC~1735MHz 50dB@1880~2700MHz				
	CH3	1880 ~ 1920				50dB@DC~1830MHz 50dB@2100~2700MHz				

² Listed are specific frequency ranges and tailor-made ranges are available.

² Please provide the information below when inquiring and mark * is required.

- * 1. The specific frequency range TX and RX
- * 2. Insertion Loss, Isolation, VSWR
- * 3. Other special requests (Power handling, Temperature, Dimension, etc.)

Mechanical Drawing

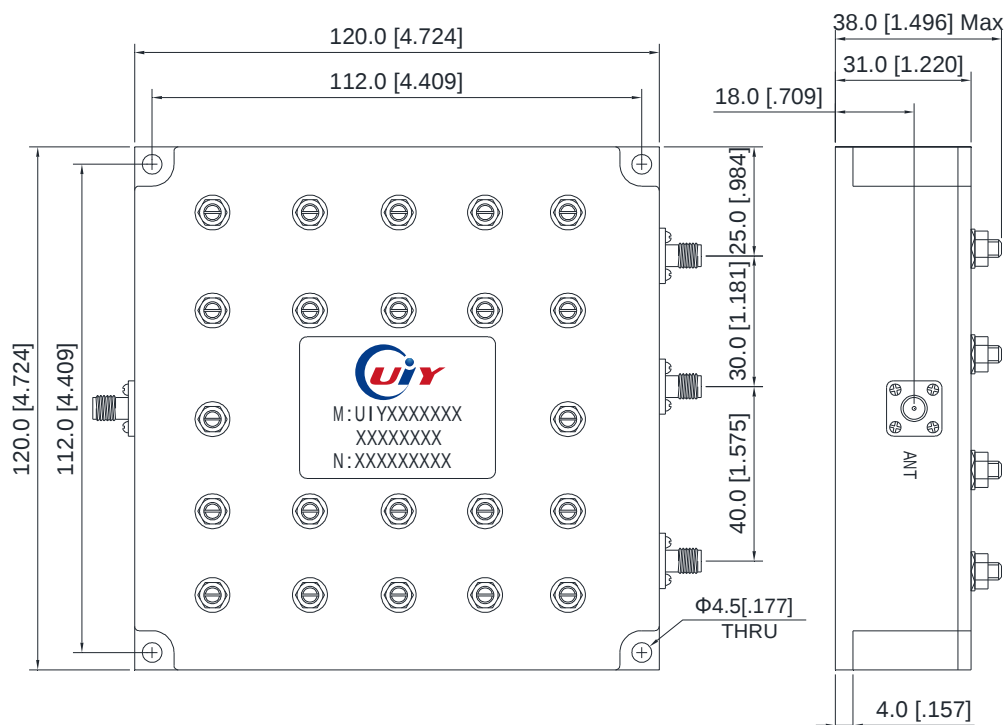

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiyinc.com

E-mail: sales@uiyinc.com