

## 12 to 18GHz – Waveguide Isolator

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

### RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYWI3898A12T18	12.0 ~ 18.0	0.4	20	1.3	100	30	WR62(BJ140)	-40 ~ +85

- 2 Listed are specific frequency ranges and tailor-made ranges are available.  
 2 Please provide the information below when inquiring and mark \* is required.
- \* 1. The specific frequency ranges
  - \* 2. Power handling (Forward, Reverse, Peak, etc.)
  - 3. Other special requests (Such as Insertion Loss, Isolation, VSWR, Temperature, Dimension etc.)

### Mechanical Drawing

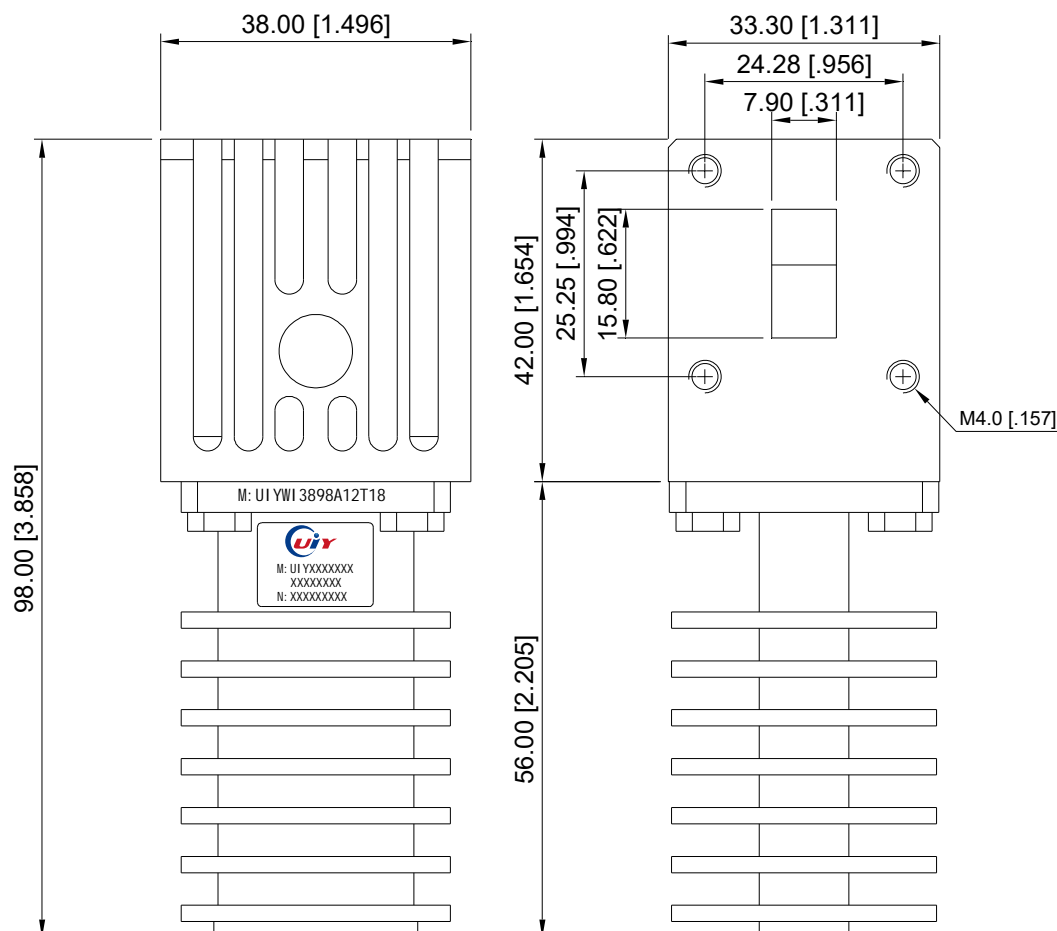

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5.0