

WR2100 (BJ4) - Waveguide to Coaxial Adapter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq.Range (MHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type (Coaxial)	CW Power (W)	Peak Power (KW)	Temp.(°C)
UIYWTCWR2100A350T530NF	350~530	0.12	1.25	WR2100 (BJ4)	N-F	100	3	-55 ~ +85
UIYWTCWR2100A350T530SF	350~530	0.12	1.25	WR2100 (BJ4)	SMA-F	100	3	-55 ~ +85
UIYWTCWR2100A350T530DF	350~530	0.12	1.25	WR2100 (BJ4)	7/16-F	100	3	-55 ~ +85


² Listed are specific frequency ranges and other tailor-made ranges are available.

² Please provide the below information when inquiring and mark * is required.

- * 1. The specific frequency ranges.

2. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

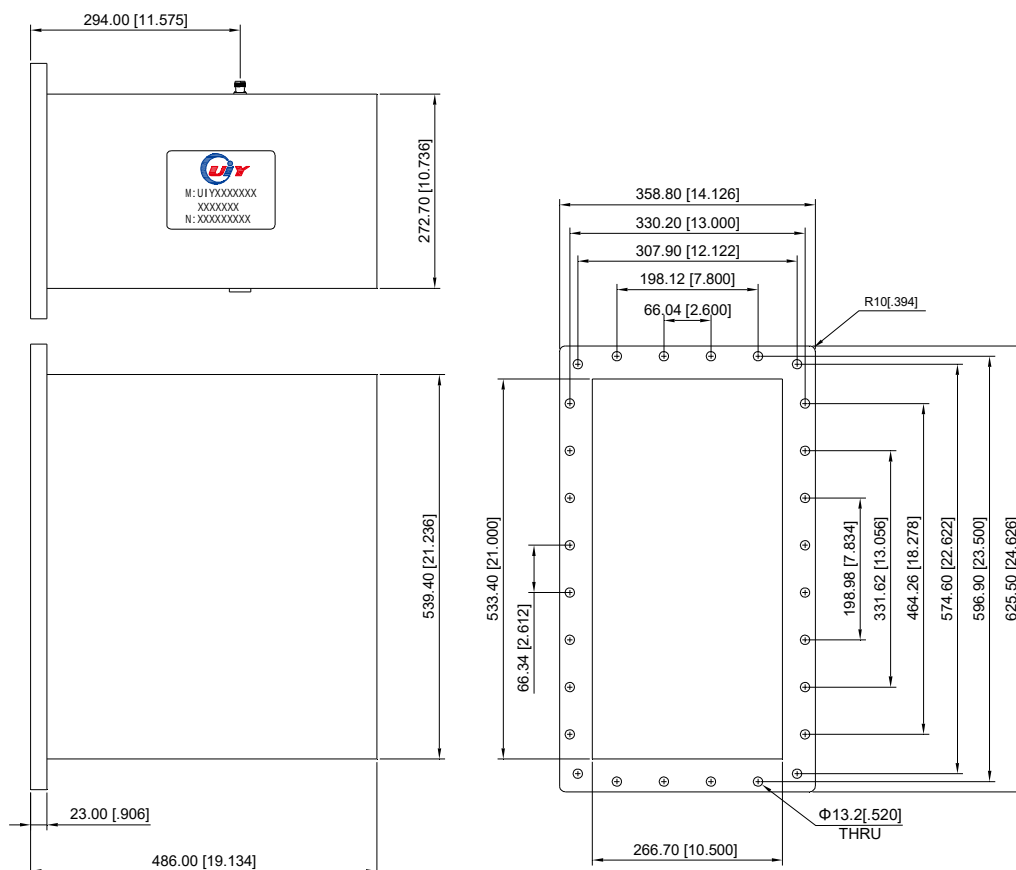

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5